


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

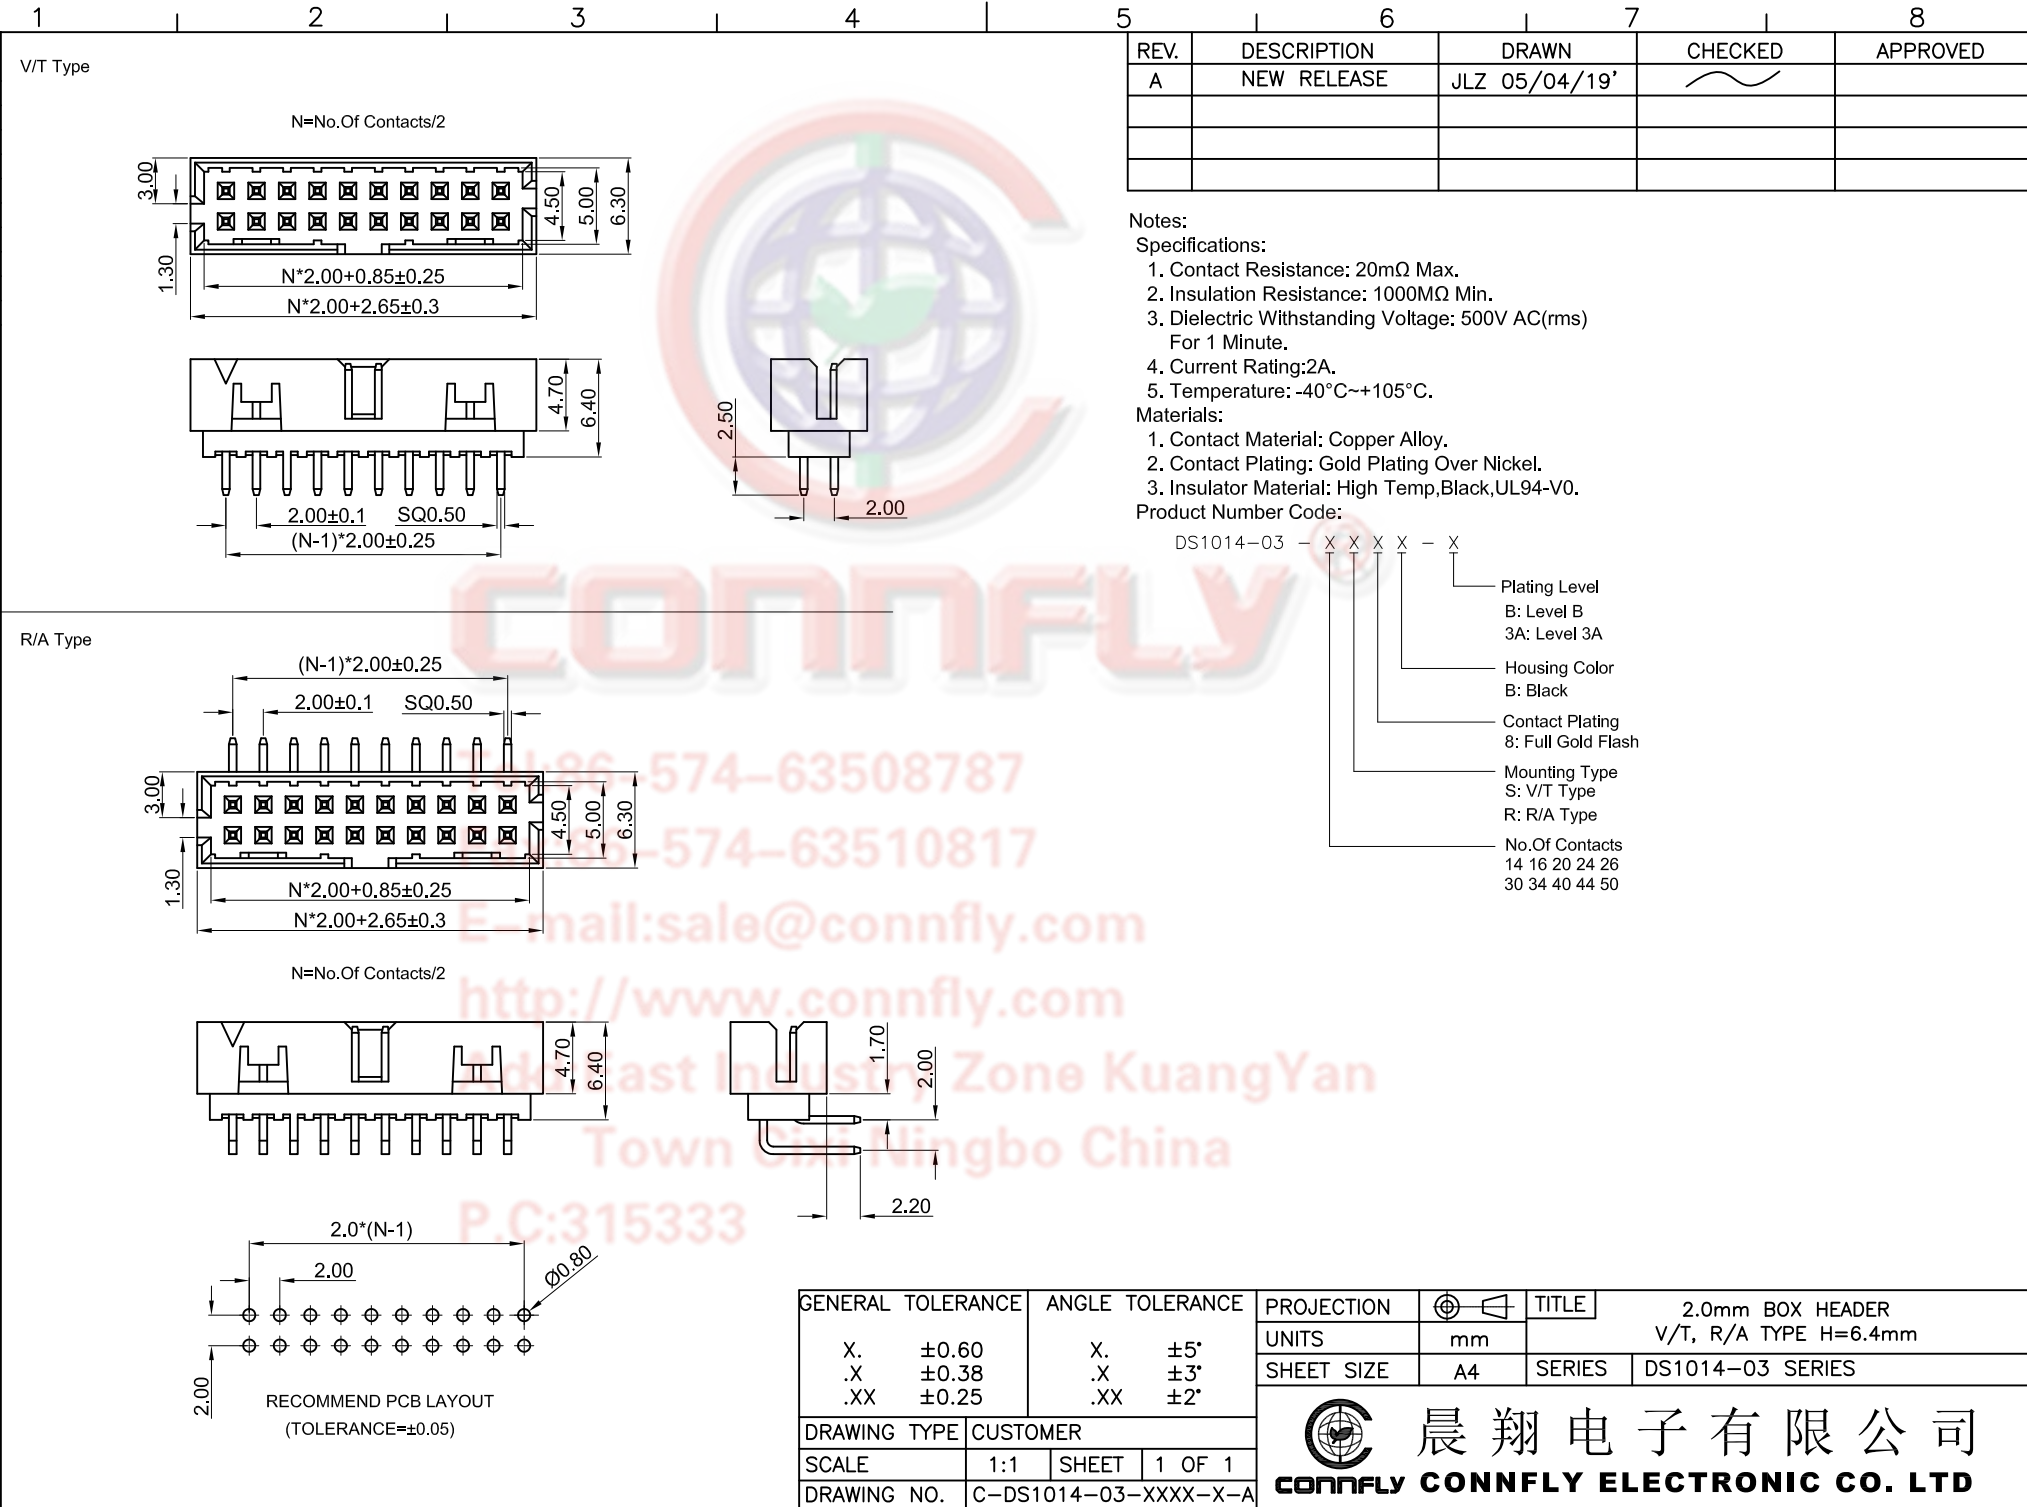

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/04/19'		

- Notes:**
- Specifications:**
- Contact Resistance: 20mΩ Max.
  - Insulation Resistance: 1000MΩ Min.
  - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
  - Current Rating: 2A.
  - Temperature: -40°C~+105°C.
- Materials:**
- Contact Material: Copper Alloy.
  - Contact Plating: Gold Plating Over Nickel.
  - Insulator Material: High Temp, Black, UL94-V0.

**Product Number Code:**

DS1014-03 - X X X X - X

- Plating Level: B: Level B, 3A: Level 3A
- Housing Color: B: Black
- Contact Plating: 8: Full Gold Flash
- Mounting Type: S: V/T Type, R: R/A Type
- No. Of Contacts: 14 16 20 24 26 30 34 40 44 50




GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.0mm BOX HEADER
.X	±0.38	.X	±3°	mm	V/T, R/A TYPE H=6.4mm
.XX	±0.25	.XX	±2°	A4	SERIES DS1014-03 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>	
SCALE		1:1 SHEET 1 OF 1			
DRAWING NO.		C-DS1014-03-XXXX-X-A			

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/04/19'		

N:NUMBER OF CONTACTS/2

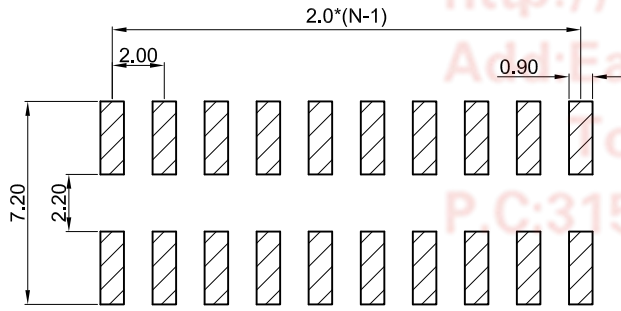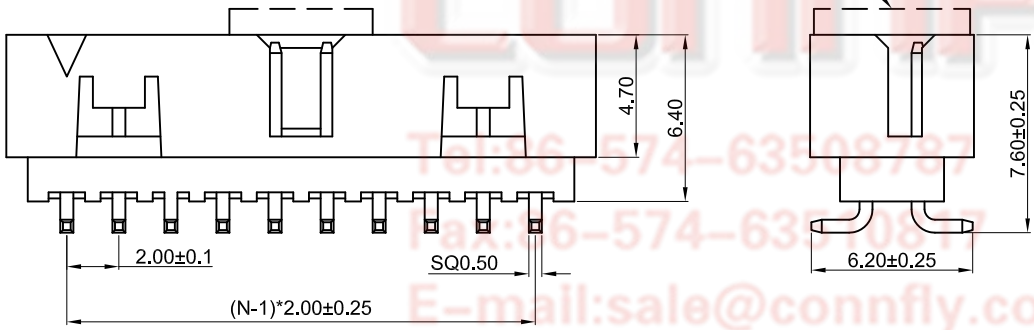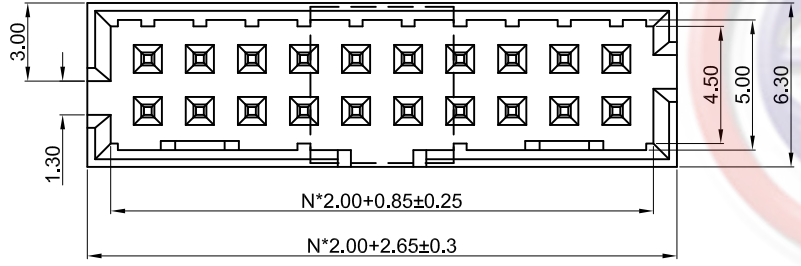

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:2A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: High Temp,Black,UL94-V0.

Product Number Code:

DS1014-03 - X X X X X - X

- Plating Level  
3A: Level 3A  
B: Level B
- Packing Type  
T:Tray  
R:Tape On Reel  
B:Tube
- Pick Up Support  
S:W/ Pick Up  
X:W/O Pick Up
- Housing Color  
B: Black
- Contact Plating  
8: Full Gold Flash
- Mounting Type  
M: SMT Type
- No.Of Contacts  
14 16 20 24 26  
30 34 40 44 50

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1014-03-XXXXXX-X-A	

PROJECTION		TITLE	2.0mm BOX HEADER SMT TYPE H=6.4mm
UNITS	mm	SHEET	A4
SHEET SIZE	A4	SERIES	DS1014-03 SERIES

**晨翔电子有限公司**  
**CONNELY CONNELY ELECTRONIC CO. LTD**