



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Cover

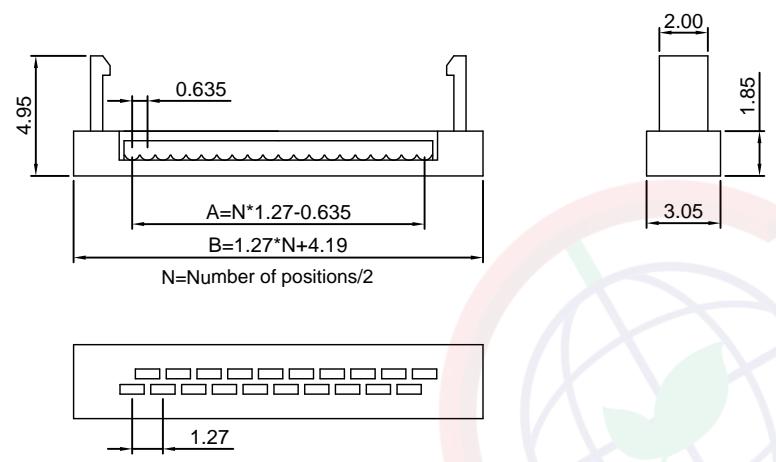

Housing

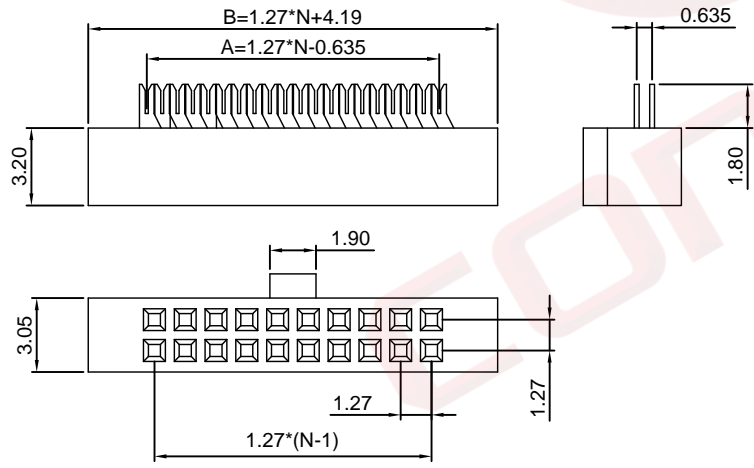

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	DRAWING UPDATE	JLZ 08/28/18'		

NOTES:

- Materials
  - Insulator: Thermoplastic(UL 94V-0).
  - Contact: Copper alloy.
- Specification
  - Temperature range: -40°C~+105°C.
  - Contact resistance: 20mΩ max.
  - Insulation resistance: 1000MΩ min.
  - Dielectric withstanding voltage: AC 500V per minute.
- Packing: PVC Tray.
- Product number code:
 

DS1017-01- X X X X

  - Contact plating
    - 8: Full gold flash
    - 2: Nickel + Gold flash
    - 6: Full tin
    - 7: Full 30u" gold
  - Polarization
    - A: W/
    - B: W/O
  - Strain relief
    - N: W/O
  - No. of contacts
    - 10 12 14 16 20 26 30 34
    - 40 44 50 60 68 80 100

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm
X.	±0.60	X.	±5°	UNITS	mm	WITH 0.635mm FLAT CABLE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017-01 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1017-01-XXXX-B					