

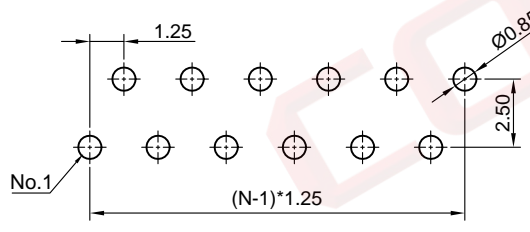


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

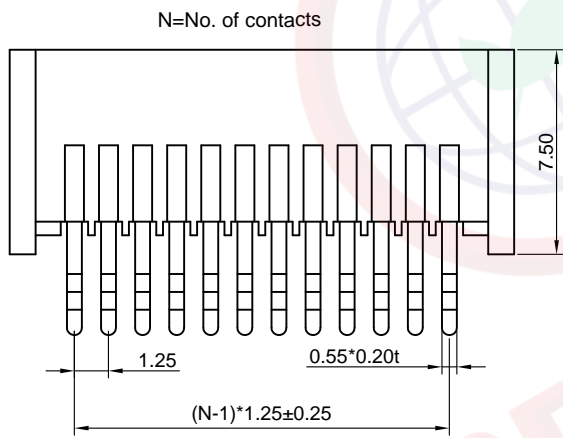

Recommend PCB layout(Tolerance:±0.05)

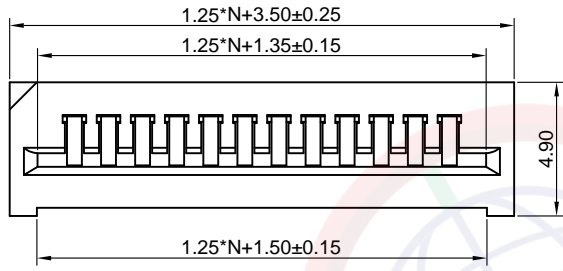

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	1.25mm FPC CONNECTOR V/T TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	
.XX	±0.25	.XX	±2°			SERIES DS1020-01 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD		
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1020-01-XXX-D					

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'		LJC 09/04/08'
B	Arrange P/N Code	JLZ 04/06/15'	HZW 04/06/15'	LJC 04/06/15'
C	DRAWING UPDATE	JLZ 09/13/17'	JLZ 09/13/17'	JLZ 09/13/17'
D	DRAWING UPDATE	JLZ 08/31/18'		

NOTES:

- Materials
 - Insulator:Thermoplastic(UL 94V-0).
 - Contact:Copper alloy.
- Specification
 - Temperature range:-20~+85°C.
 - Contact resistance:20mΩ max.
 - Insulation resistance:500MΩ min.
 - Dielectric withstanding voltage:AC 250V per minute.
- Product number code:
 DS1020-01- X X X
 Contact plating T1: Tin
 Housing color V: Ivory
 No. of contacts 04-32