

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

N=No. of contacts




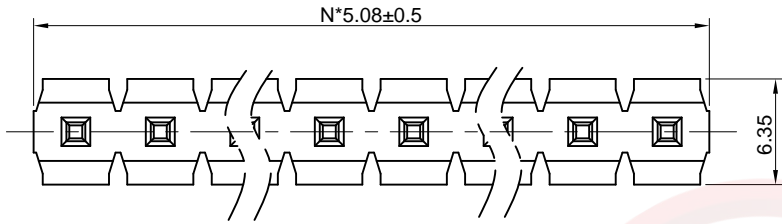


Table A:

Type	Dimension	
	A	B
1	11.94	4.57
2	13.21	4.57
3	6.00	3.00
4		
5		

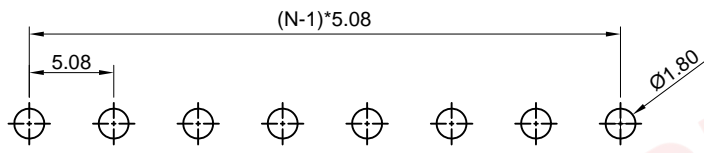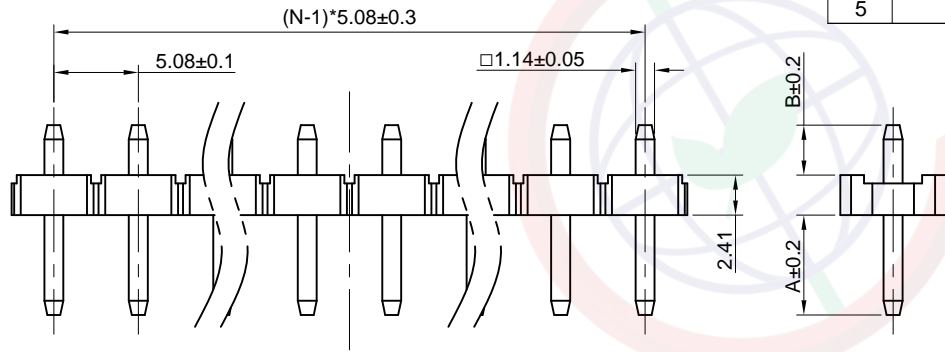

Recommend PCB layout  
(Tolerance:±0.05)

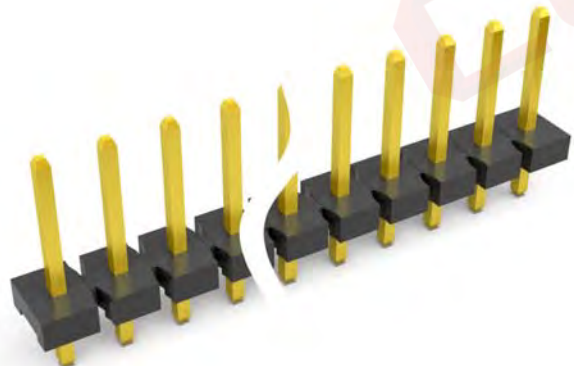

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/15/09'		LJC 01/15/09'
B	ADD PLATING LEVEL	JLZ 09/24/14'		LJC 09/24/14'
C	MODIFY	LXX 04/01/16'	HZW 04/01/16'	LJC 04/01/16'
D	DRAWING UPDATE	JLZ 12/15/18'		

NOTES:

Specifications:


- Contact resistance: 20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1000V AC(rms) for 1 minute.
- Current rating:7A.
- Voltage rating:250V AC rms.
- Temperature: -40°C~+105°C.

Materials:

- Contact material: Copper alloy.
- Contact plating: Gold plating over nickel.
- Insulator material: Thermoplastic,Black,UL94-V0.

Product number code:

DS1021-06- X X X X - X

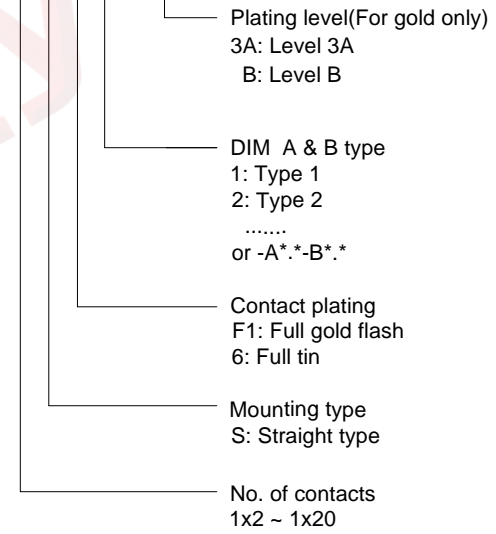

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 5.08mm
X.	±0.60	X.	±5°	UNITS	mm	V/T TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1021-06 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1021-06-XXXX-X-C					

**晨翔电子有限公司**  
CONNELY ELECTRONIC CO. LTD