


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/05/14'	~	LJC 05/05/14'
B	DRAWING UPDATE	JLZ 01/09/19'	~	

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

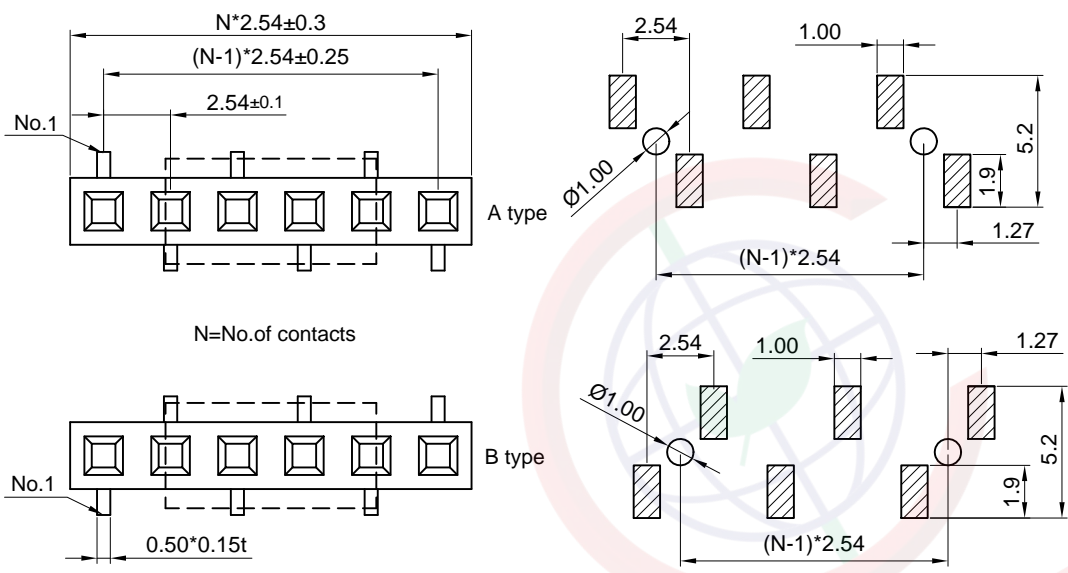


N=No. of contacts

Recommend PCB layout  
(Tolerance:±0.05)

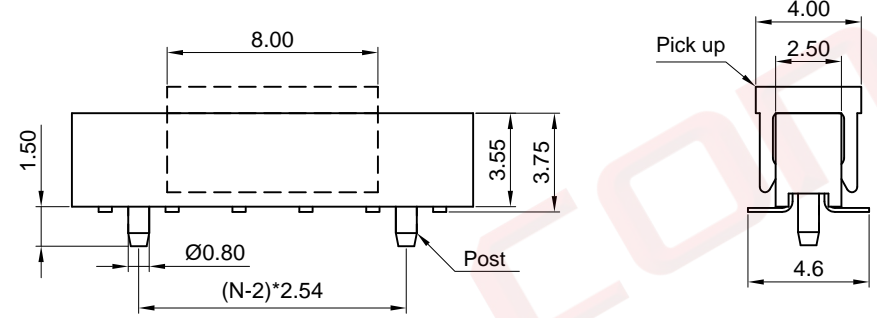

(Series Image-Reference Only)

Notes:  
Specifications:  
1. Contact Resistance: 20mΩ Max.  
2. Insulation Resistance: 1000MΩ Min.  
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.  
4. Current Rating:3A.  
5. Temperature: -40°C~+105°C.  
Materials:  
1. Contact Material: Copper Alloy.  
2. Contact Plating: Gold Plating Over Nickel.  
3. Insulator Material: High Temp,Black,UL94-V0.  
Product Number Code:  
DS1023-25 - X X X X X X X X  
Post support  
S:W/ post  
X:W/O post  
Packing type  
B:Tube  
R:Tape on reel  
Pick up support  
S:W/ pick up  
X:W/O pick up  
Bend type  
1: A type  
2: B type  
Contact plating  
6: Matt tin  
8: Full gold flash  
Housing color  
B:Black  
No. of contacts  
1x3-1x40

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	2.54mm FEMALE HEADER
X. ±0.60	X. ±5°	UNITS mm		SINGLE ROW SMT TYPE H=3.55mm
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES	DS1023-25 SERIES
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER	 <b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>		
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C-DS1023-25-XXXXXX-B			