



Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/05/14'	~	LJC 05/05/14'
B	DRAWING UPDATE	JLZ 04/11/17'	HZW 04/11/17'	LJC 04/11/17'
C	DRAWING UPDATE	JLZ 01/11/19'	~	

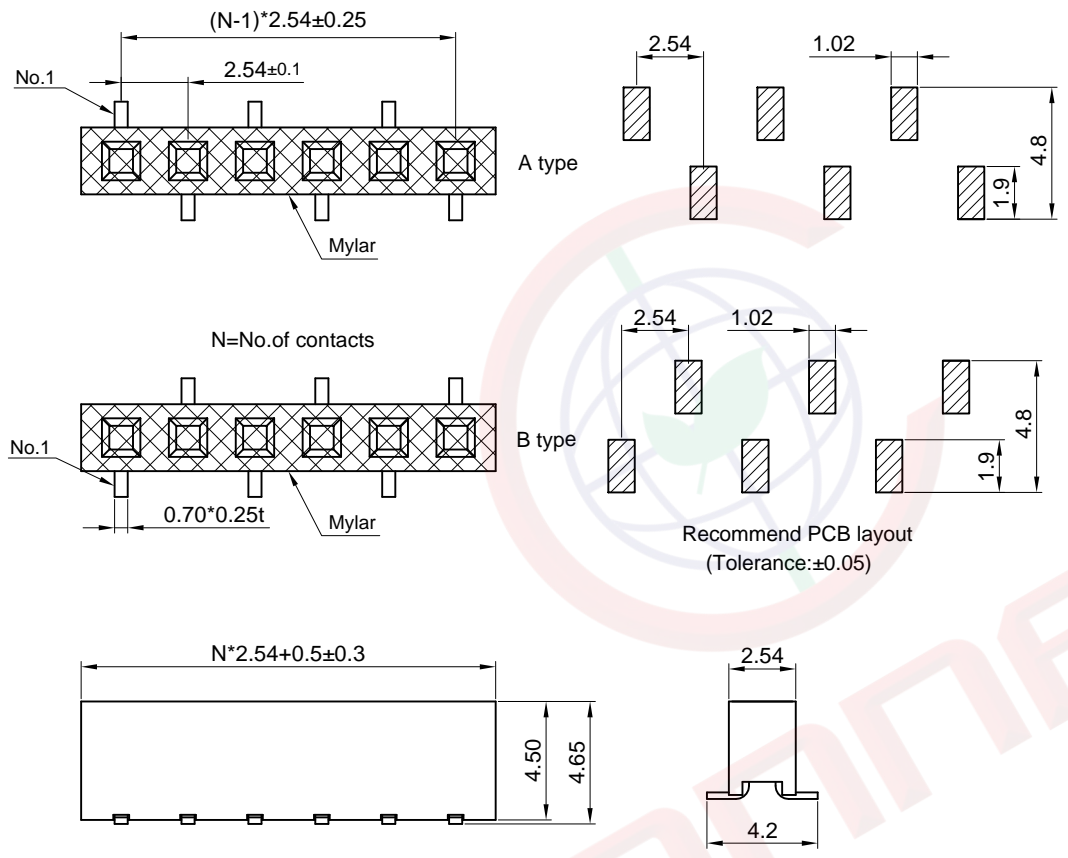

Notes:  
 Specifications:  
 1. Contact Resistance: 20mΩ Max.  
 2. Insulation Resistance: 1000MΩ Min.  
 3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.  
 4. Current Rating:3A.  
 5. Temperature: -40°C~+105°C.  
 Materials:  
 1. Contact Material: Copper Alloy.  
 2. Contact Plating: Gold Plating Over Nickel.  
 3. Insulator Material: High Temp,Black,UL94-V0.  
 Product Number Code:  
 DS1023-27 - X X X X X X X  
 Legend:  
 Post support X:W/O post  
 Packing type B:Tube  
 Pick up support X:W/O Pick up M:W/ Mylar  
 Bend type 1: A type 2: B type  
 Contact plating 8: Full gold flash  
 Housing color B:Black  
 No.of contacts 1x2-1x40

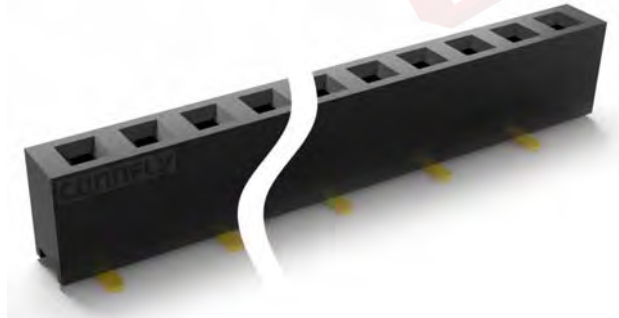

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-27-XXXXXX-C		

PROJECTION		TITLE	2.54mm FEMALE HEADER
UNITS	mm		SINGLE ROW SMT TYPE H=4.50mm
SHEET SIZE	A4	SERIES	DS1023-27 SERIES

晨翔电子有限公司  
CONNELY ELECTRONIC CO. LTD