
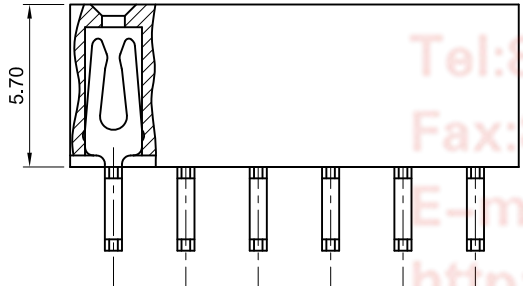


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/22/18'		

N=No.OF CONTACTS/2(DOUBLE ROW)

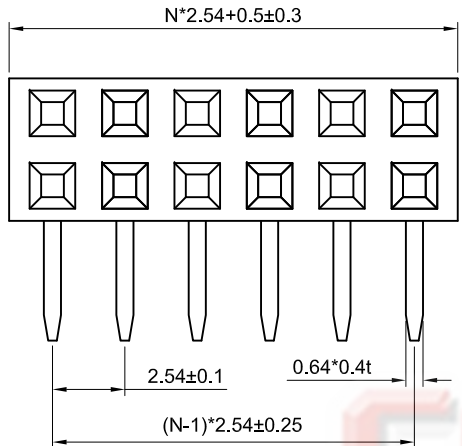

Tel: 86-574-63508787
 Fax: 86-574-6351081
 E-mail: sale@connfly.com
 http://www.connfly.com

Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.O: 315333

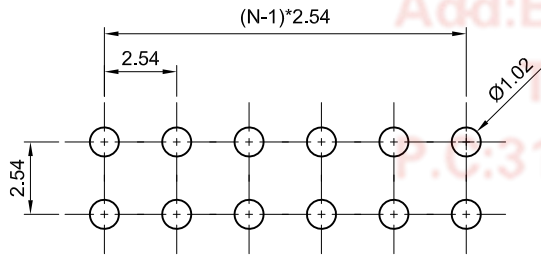

PCB LAYOUT

NOTES:

- CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING: 3A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD
 - INSULATOR MATERIALS: PBT, BLACK, UL94-V0.
- PRODUCT NUMBER CODE:

DS1023-53- X X X

- X: CONTACT PLATING
- 8: FULL GOLD FLASH
- 2: NICKEL + GOLD FLASH
- : MOUNTING TYPE
- R: R/A TYPE
- : No.OF CONTACTS
- 2x2~2x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-53-XXX-A		

PROJECTION		TITLE	2.54mm Female Header
UNITS	mm		R/A Type H=5.7mm
SHEET SIZE	A4	SERIES	DS1023-53 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8