

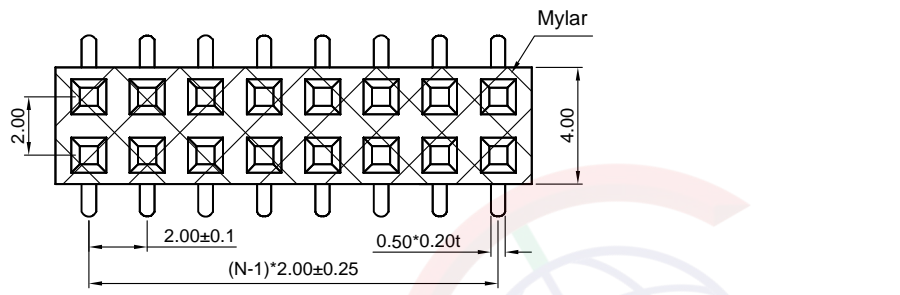


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

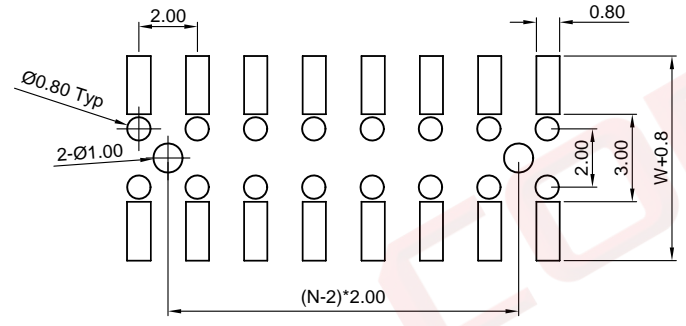

N=Number of contacts/2

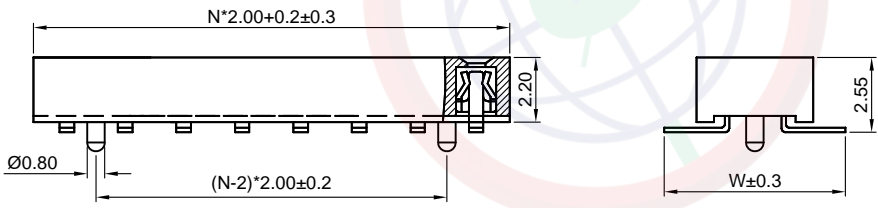

Recommend PCB layout  
(Tolerance:±0.05)

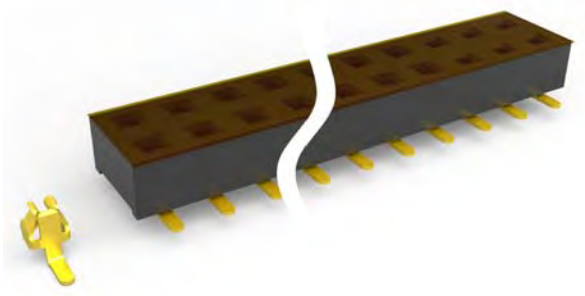

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 02/15/17'		LJC 02/15/17'
B	DRAWING UPDATE	JLZ 09/04/19'		

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
4. Current Rating:1.5A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Material: High temp,Black,UL94-V0.

Product Number Code:

DS1026-23 - X X X X X X X X

- X: Post support
- S:W/ Post
- X:W/O Post
- DIM. W support
- 2:W=6.2
- Pick up support
- X:W/O Mylar(for tube)
- S:W/ Mylar
- Packing type
- R:Tape on reel
- B:Tube
- Contacts type
- S:SMT type
- Housing color
- B:Black
- Contact plating
- 8: Full gold flash
- Connector type
- S:Socket
- No.of contacts
- 2x2~2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.00mm Female Header Double Row SMT H=2.2mm Type				
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1026-23 SERIES				
.X	±0.38	.X	±3°	SHEET SIZE	A4						
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>						
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.		C-DS1026-23-XXXXXXXXX-B									