


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document for any purpose without the prior written permission of CONNPLY is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

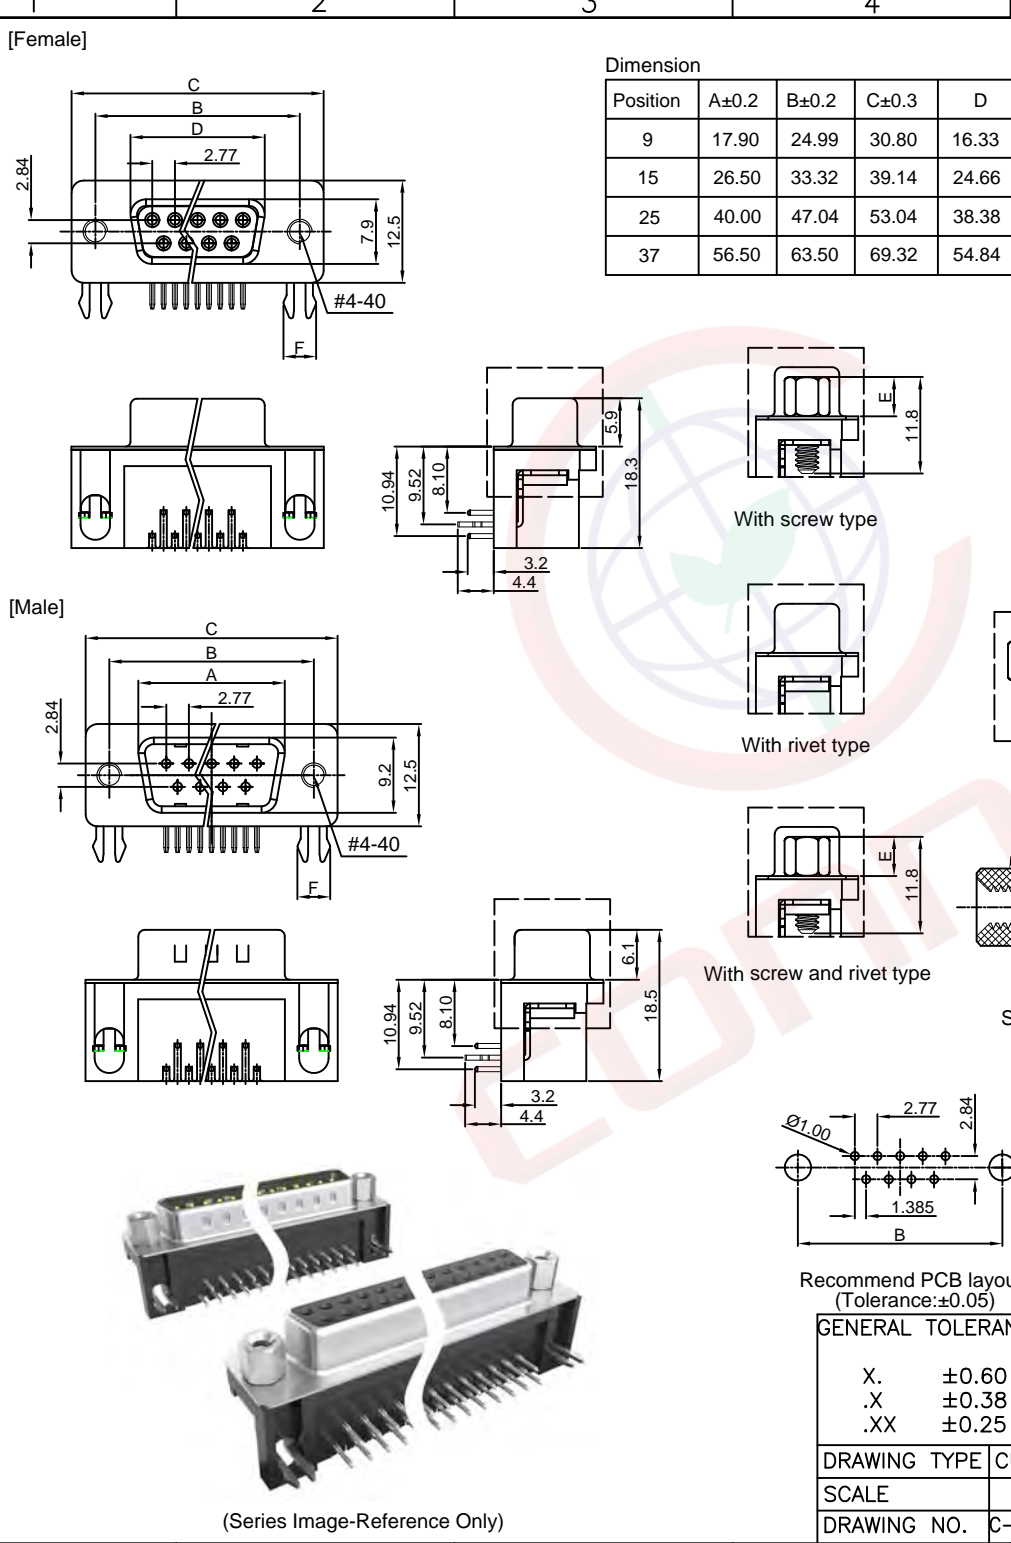

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 02/27/10'		LJC 02/27/10'
B	DRAWING UPDATE	JLZ 10/07/20'		

- NOTES:**
- Electrical characteristics:
 - Contact resistance: 20mΩ Max. Initial.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
 - Environment characteristics:
 - Temperature range: -40°C~+105°C.
 - Materials:
 - Insulator:PBT+Glass fiber
 - Shell:Steel
 - Contact:Copper alloy
 - Product number code:
 DS1037-04 - X X X X X X X X
 - Screw DIM. E
 - 4: 4.80mm 5: 5.80mm
 - 6: 4.80mm(Inside thread M2.6*0.45p, outside thread unc#4-40)
 - M3: 4.80mm(Inside thread M3.0, outside thread unc#4-40)
 - Board lock DIM. F
 - 7: 3.70mm
 - Contact plating
 - T: Selective gold flash
 - Si: Full gold flash
 - 6: Full tin
 - Color of housing
 - K: Black B: Blue
 - Screw type
 - A: With screw type B: With rivet type
 - C: With screw and rivet type
 - D: Rivet type with screws in bulk package
 - E: With rivet type(N/A Thread)
 - Shell plating
 - N: Nickel T: Tin
 - Connector type
 - M: Male F: Female
 - No. of contact
 - 09,15,25,37

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		D-SUB
.X	±0.38	.X	±3°	mm	R/A(7.2mm) Machine Pin Type
.XX	±0.25	.XX	±2°	A4	SERIES DS1037-04 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNPLY ELECTRONIC CO. LTD	
SCALE		1:1 SHEET 1 OF 1			
DRAWING NO.		C-DS1037-04-XXXXXXX-B			