

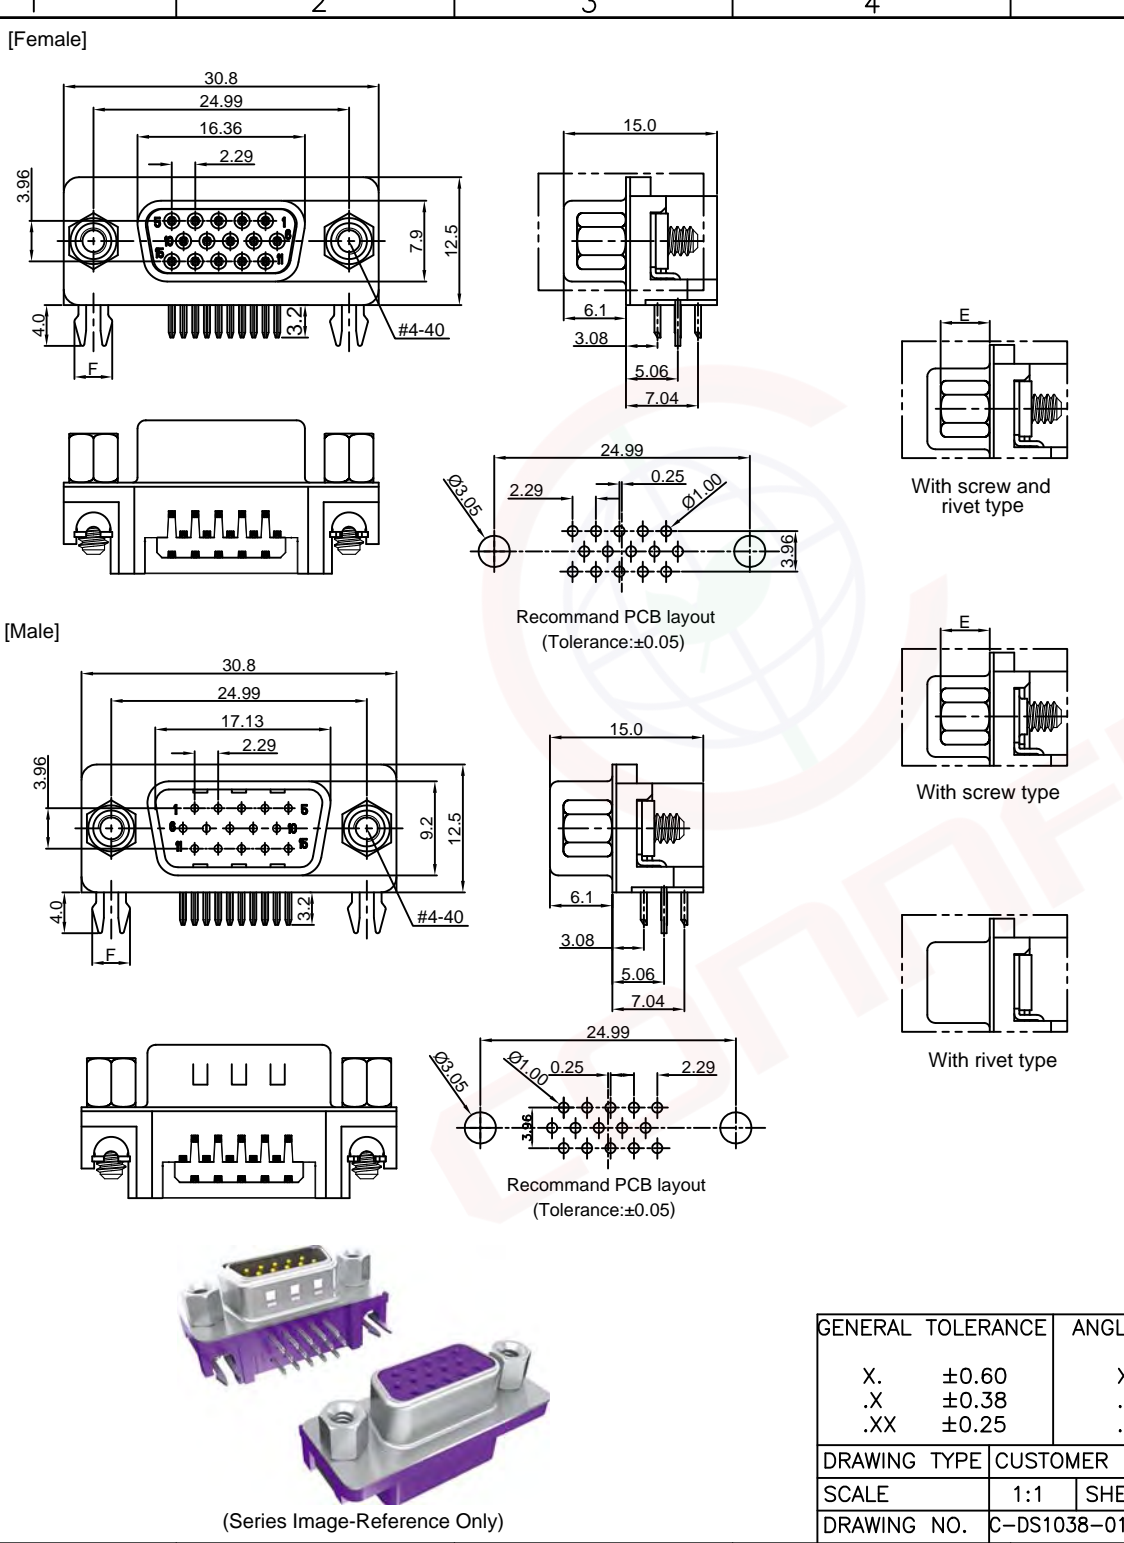


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use, reproduction, or distribution of this information is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

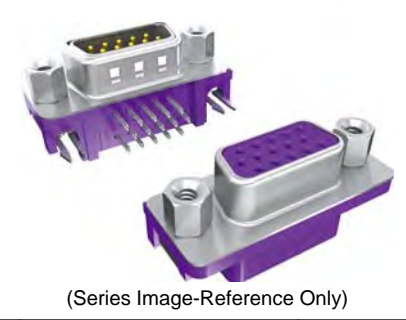

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/12/08'		LJC 06/12/08'
B	DRAWING UPDATE	JLZ 10/07/20'		
C	DRAWING UPDATE	JLZ 06/28/22'		

- NOTES:**
- Electrical characteristics:
    - Contact resistance: 20mΩ Max. Initial.
    - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
    - Insulation resistance: 1000MΩ Min.
  - Environment characteristics:
    - Temperature range: -40°C~+105°C.
  - Materials:
    - Insulator:PBT+Glass fiber
    - Shell:Steel
    - Contact:Copper alloy
  - Product number code:  
DS1038-01 - X X X X X X X

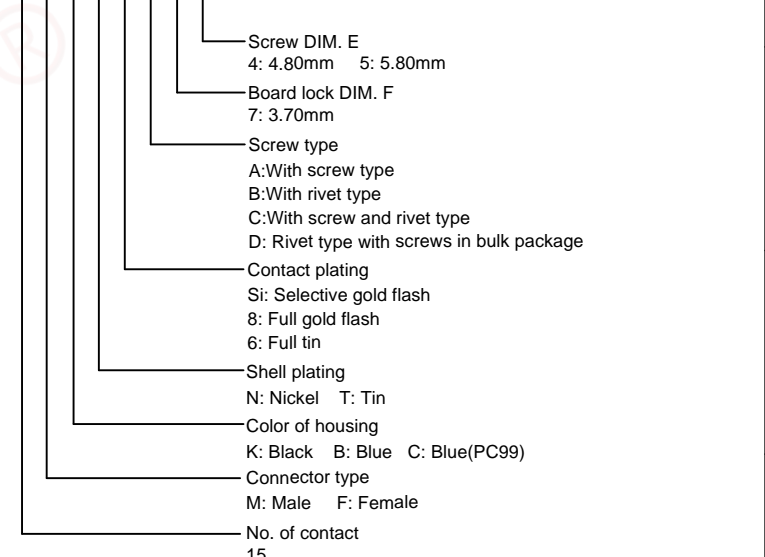

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	D-SUB H.D R/A 3.08mm Type					
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1038-01 SERIES					
.X	±0.38	.X	±3°	SHEET SIZE	A4							
.XX	±0.25	.XX	±2°									
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> CONNELY ELECTRONIC CO., LTD								
SCALE		1:1							SHEET		1 OF 1	
DRAWING NO.		C-DS1038-01-XXXXXXX-C										