
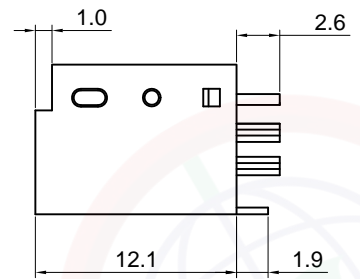





The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice and to discontinue its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


Male



Female

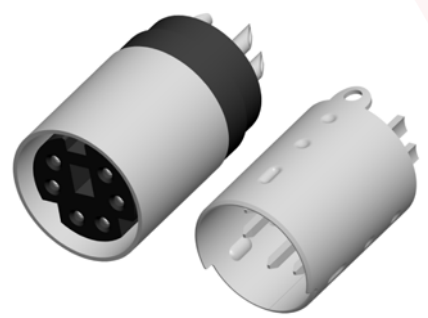

(Series Image-Reference Only)

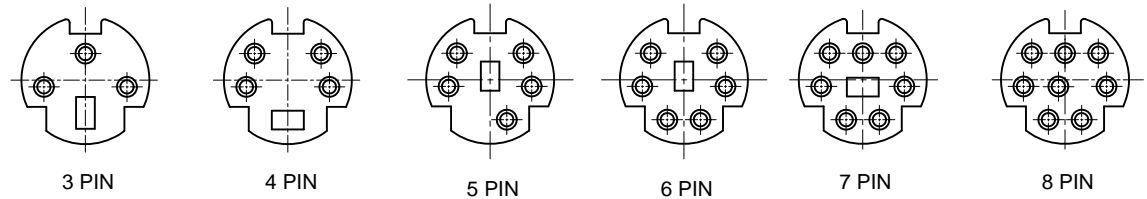

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/23/06'		
B	DRAWING UPDATE	JLZ 03/10/22'		

Notes:

Specifications:

1. Contact Resistance: 30mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
4. Current Rating: 1A @ 30V.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy, Tin Plated.
2. Insulator Material: PBT, Black.
3. Shell Material: Copper Alloy, Nickel Plated.

Product Number Code:

DS1062 - X X X X X

- Contact plating
6: Full tin
- No. of contacts
3.4.5.6.7.8
- Shell plating
N: Nickel
- Housing color
B: Black
- Connector type
F: Female
M: Male

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MINI DIN Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1062 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1062-XXXXX-B					