


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 25/06/05		

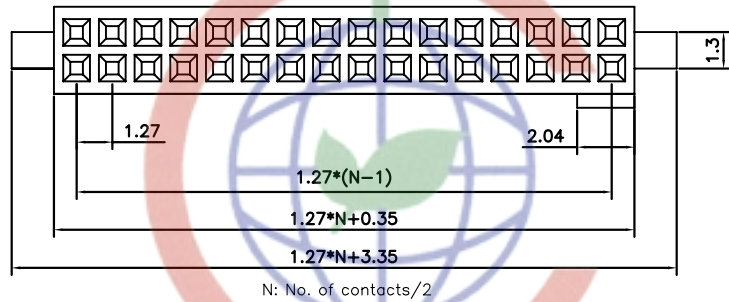

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS




- . Contact Material: Copper alloy
- . Insulator: Thermoplastic(UL94 V-0)

3. PART NUMBER: DS1065-04

4. PRODUCT NUMBER CODE:

DS1065-04 - X X X X X

- X: MOUNTING TYPE  
V: V/T TYPE
- X: HOUSING COLOR  
B: BLACK
- X: CONTACT PLATING  
8: FULL GOLD FLASH
- X: CONNECTOR TYPE  
S: SOCKET
- X: No. OF CONTACTS  
2\*1-2\*40

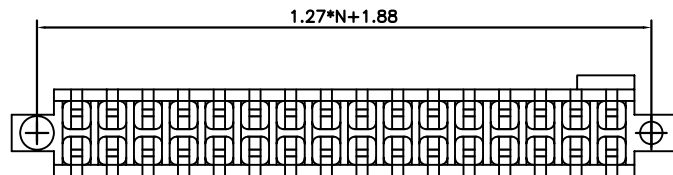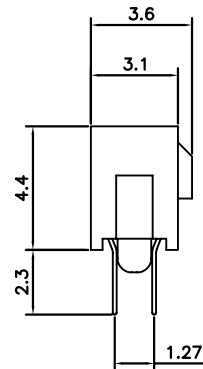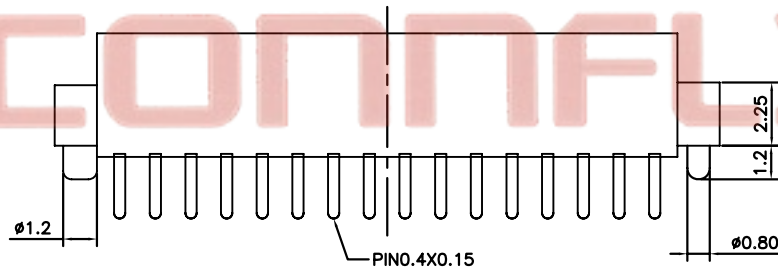

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

Add: East China Town, Ningbo Zone, China

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	WITH POLARIZATION AND LOCAL PEG V/T TYPE
X. ±0.60	X. ±5°	UNITS	mm	SERIES	DS1065-04
.X ±0.38	.X ±3°	SHEET SIZE	A4		
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1065-04-XXXXX		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		