
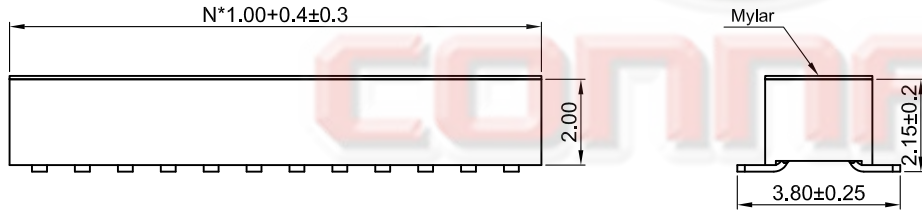



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09'		LJC 03/24/09'
B	DRAWING UPDATE	JLZ 09/29/19'		

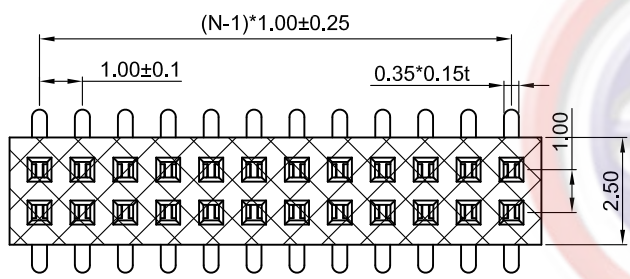

N=No.of contacts/2

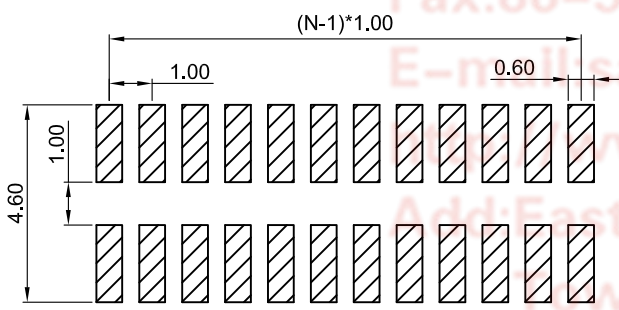

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

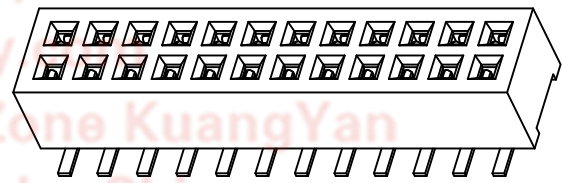

NOTES:

- SPECIFICATIONS
 - Current Rating: 1.0A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -40°C to+105°C
- MATERIALS:
 - Housing: Thermoplastic(UL94 V-0)
 - Contact: Copper alloy

3.PRODUCT NUMBER CODE:

DS1065-11 - X X X X X

- X Packing type
- R:Tape on reel
- Pick up support
- M:W/ Mylar
- Housing color
- B: Black
- Contact plating
- 8: Full gold flash
- Connector type
- S: Socket
- No.of contacts
- 2x2-2x50

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C.315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.00mm Female Header
X.	±0.60	X.	±5°	UNITS	mm		W/O Post SMT Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-11 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1065-11-XXXXXX-A					

1 2 3 4 5 6 7 8