

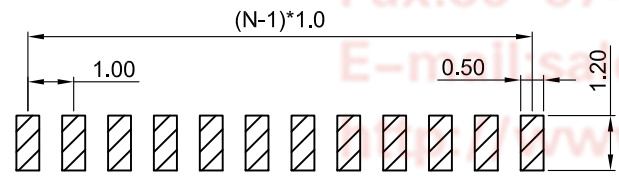
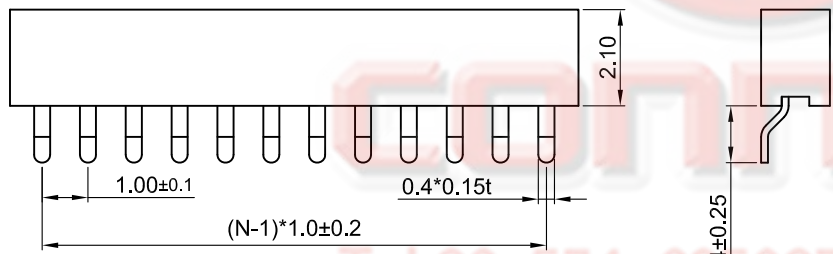


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/22/18'	HZW 03/22/18'	LJC 03/22/18'
B	DRAWING UPDATE	JLZ 08/09/18'		

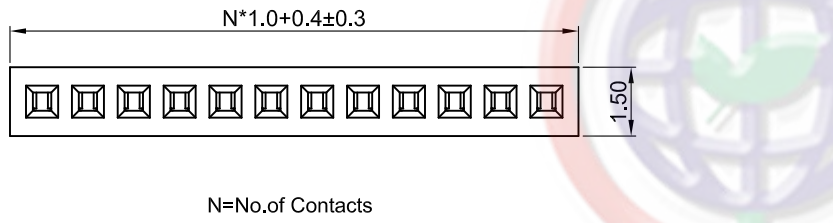

NOTES:

- SPECIFICATIONS**
 - . Current Rating: 1.0A
 - . Insulation Resistance: 500MΩ Min
 - . Dielectric Withstanding: 300V AC
 - . Contact Resistance: 20mΩ Max
 - . Operating Temperature: -40°C to +105°C


- MATERIALS:**
 - . Housing: Thermoplastic(UL94 V-0)
 - . Contact: Copper alloy

3.PRODUCT NUMBER CODE:


DS1065-26 - X X X X X 0 X 0

- Packing Type
B:Tube
R:Tape On Reel
- Housing Color
B:Black
- Contact Plating
8:Gold Flash
- Mounting Type
S:SMT Type
- Connector Type
S:Socket
- No.of Contacts
1x1-1x50

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	FEMALE HEADER PITCH
UNITS	mm		1.00mm R/A SMT TYPE
SHEET SIZE	A4	SERIES	DS1065-26 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1065-26-XXXXX0X0-B		


晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8