



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/04/06'		LJC 07/04/06'
B	DRAWING UPDATE	JLZ 05/23/19'		

Contact






HOUSING

Position	DIMENSION	
	A	B
2	2.0	4.7
3	4.0	6.7
4	6.0	8.7
5	8.0	10.7
6	10.0	12.7
7	12.0	14.7
8	14.0	16.7
9	16.0	18.7
10	18.0	20.7
11	20.0	22.7
12	22.0	24.7
13	24.0	26.7
14	26.0	28.7



Housing

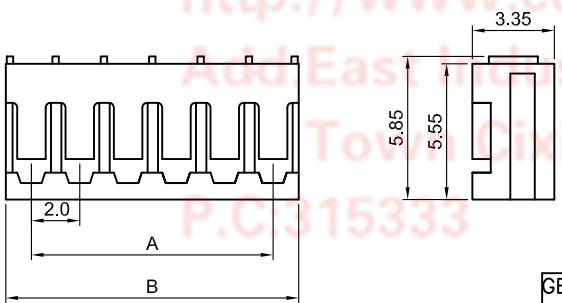


NOTES:

- MAIN SPECIFICATIONS
 - . Housing material: NYLON 66
 - . Wire range: AWG#30~#24
 - . Rated voltage: 250V
 - . Rated current: 1A
 - . Contact resistance: 30mΩ Max
 - . Insulation resistance: 1000MΩ Min
 - . Withstanding voltage: 500V,AC 1 minute
 - . Temperature range: -25 ~ +85°C
 - . Recommend PC board thickness:1.2~1.6mm
- PRODUCT NUMBER CODE:


Contact

T - DS1067-01 - S C 6 00



Housing

I - DS1067-01 - S C W 0 X



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	P.C.B CONNECTOR 2.0mm SANW TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1067-01 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1067-01-XXXXX-B						

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8