

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/12/15'		

NOTES:

1. Materials:

- 1.1 Housing material: NYLON 66
- 1.2 Contact: Copper Alloy
- 1.3 Wire Insulator: PVC
- 1.4 Wire: Tin Plated Copper

2. Specifications:

- 2.1 Current Rating:1.5A
- 2.2 Voltage Rating:250V AC/DC
- 2.3 Contact Resistance: 20mΩ Max.(Connector Only)
- 2.4 Insulation resistance: 1000MΩ Min.(Connector Only)
- 2.5 Wire Range:AWG#22~26

3. Packing Type:PE Bag+Inner Box+Ouler Box

4. Product Number Code:

DS1071-02 - X X X X X X X

WIRE LENGTH(DIM L)

- 080: 80mm
- 180: 180mm

WIRE STYLE

- A: UL 1007

CONTACT PLATING

- 6: Full Tin
- 8: Full Gold

HOUSING COLOR

- B: Black

WIRE GAUGE


- 26: AWG #26 24: AWG #24
- 22: AWG #22

MOUNTING TYPE

- C: Crimp
- W: Crimp+Soldering

No.OF CONTACTS

- 2*2~2*40

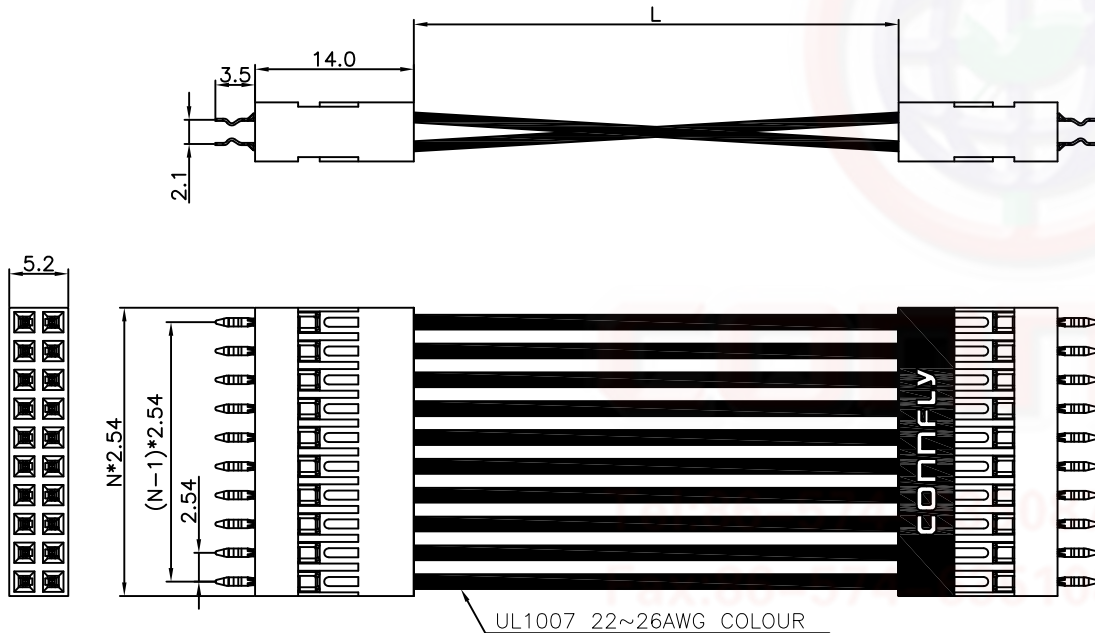

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	2.54mm CONNFLY STYLE WITH LOCK PCB TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	
.XX	±0.25	.XX	±2°			SERIES DS1071-02 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD		
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1071-02-XXXXXXX-A				