

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/11/09		

NOTES:

- SPECIFICATION:
 - Current Rating: 1.5A.
 - Insulation Resistance: 1000MΩ min.
 - Dielectric Withstanding: 500V for One minute.
 - Contact resistance: 50mΩ max.
 - Operating Temperature: -40°C to +105°C

2. MATERIALS

- Housing: Thermoplastic(UL94 V-0).
- Contact: Copper alloy.
- Shell: Steel.







3. Product Number code:

DS1082-03 - X X X X X

- Screw type
- CC: CC type
- DS: DS type
- Shell plating
- N: All Nickel
- 6: All Tin
- Housing color
- B: black
- L: blue
- Contact plating
- 8: Full gold flash

Connector type

- 15F: 15Female & 15Female
- 15M: 15Male & 15Female
- 15P: 15Male & 15Male
- 26F: 26Female & 26Female
- 26M: 26Male & 26Female
- 26P: 26Male & 26Male
- 44F: 44Female & 44Female
- 44M: 44Male & 44Female
- 44P: 44Male & 44Male
- 62F: 62Female & 62Female
- 62M: 62Male & 62Female
- 62P: 62Male & 62Male

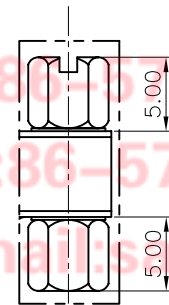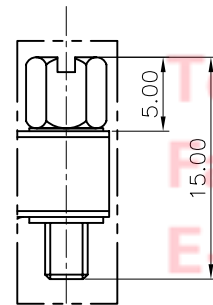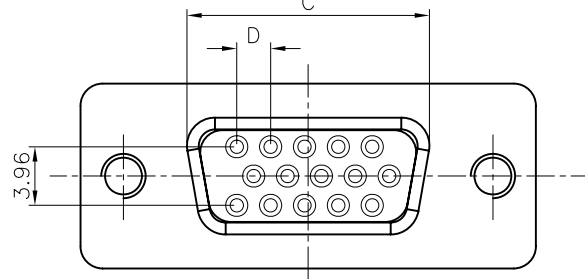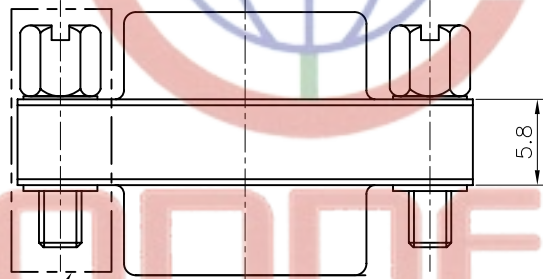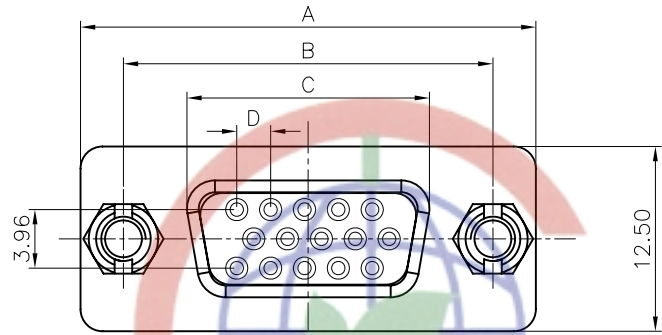

CC TYPE

DS TYPE

Dimension

Position	A±0.2	B±0.2	C±0.2		D±0.2
			FEMALE	MALE	
15	30.80	24.99	16.33	17.90	2.29
26	39.14	33.32	24.66	26.50	2.29
44	53.04	47.04	38.38	40.00	2.29
62	69.32	63.50	54.84	56.50	2.41

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	H.D-SUB ADAPTOR
.X	±0.38	.X	±3°	A4	DS1082-03 SERIES
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE		SHEET		1 OF 1	
DRAWING NO.		C-DS1082-03-XXXXX			