

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | YCH 12/16/09' | ~ | |
| | | | | |
| | | | | |

NOTES:





1. SPECIFICATIONS

- . Contact Resistance: 30mΩ max
- . Insulation Resistance: 1000MΩ min.
- . Current Rating: 1A
- . Dielectric withstanding voltage: AC 500V For 1 minute
- . Contact: Copper alloy.
- . Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:

DS1091-03 - X X X X

- Screw type
 - X: W/O screw
 - S: W/ #4-40(UNC) screw
 - D: Rivet type with screw in bulk package
- Contact plating
 - 0: Selective gold flash
- Shell plating
 - N: Nickel
 - 6: Tin
- Color of housing
 - W: WHITE
 - B: BLACK
 - V: Ivory

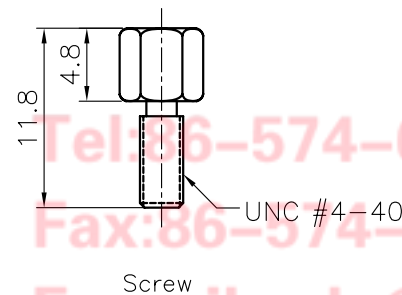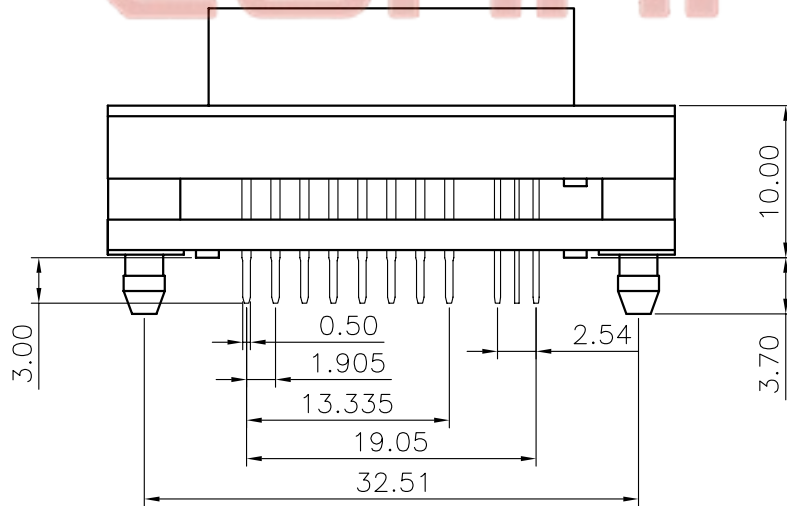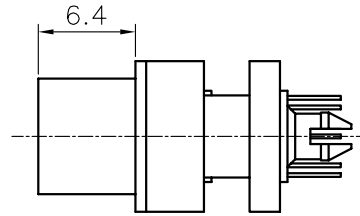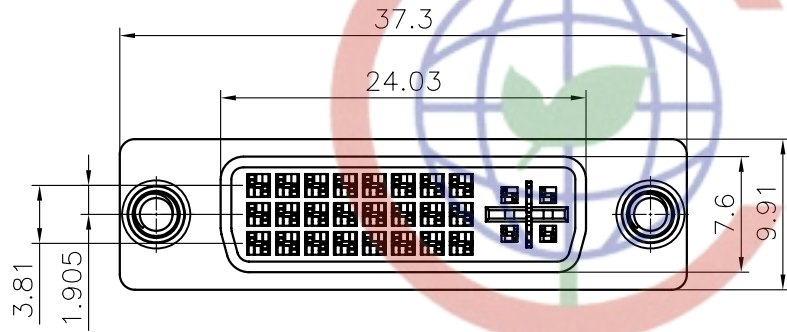

| | | | | | | | |
|-------------------|-------|------------------|--------------|---|----|--------|-----------------------------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | DVI RECEPTACLE 24+5 |
| X. | ±0.60 | X. | ±5° | UNITS | mm | | VERTICAL THROUGH STACK TYPE |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1091-03 |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | |
| DRAWING TYPE | | CUSTOMER | | | | | |
| SCALE | | 1:1 | SHEET 1 OF 1 | | | | |
| DRAWING NO. | | C-DS1091-03-XXXX | | | | | |