




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH07/17/05'		

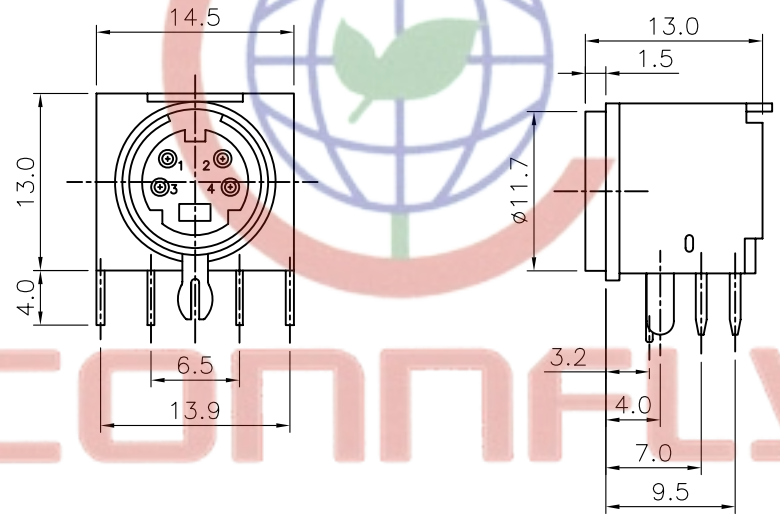


NOTES:

- SPECIFICATIONS:
 - VOLTAGE RATING: 30V DC.
 - CONTACT CURRENT RATING: 1A MAX. PER PIN.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

DS1093-06 - X X X X

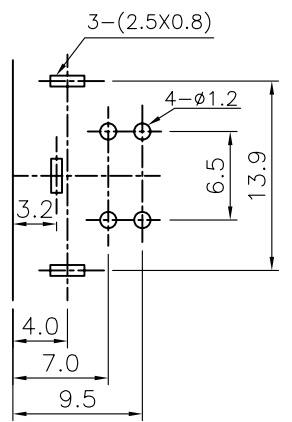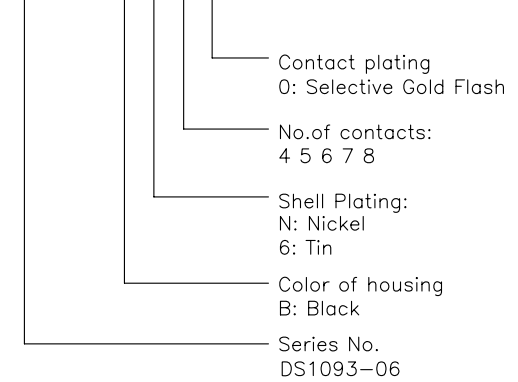

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

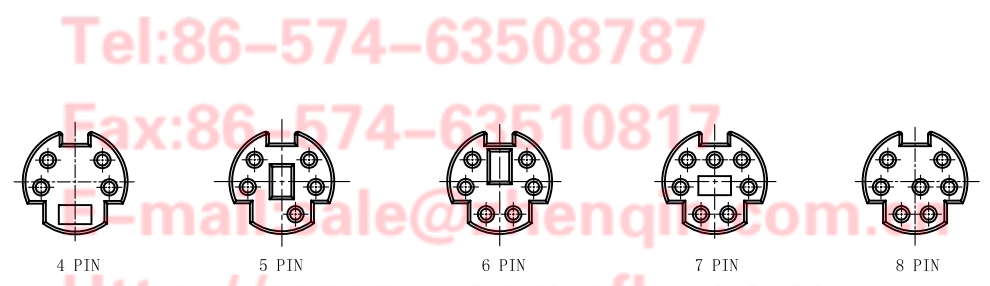

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	MINI DIN 801 TYPE
X. ±0.60	X. ±5°	UNITS	mm	SHEET SIZE	A4
.X ±0.38	.X ±3°			SERIES	DS1093-06 SERIES
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1 SHEET 1 OF 1				
DRAWING NO.	C-DS1093-06-XXXX				

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@connfly.com

Http://www.connfly.com

Address: East Industry Zone Kuang Yan Town, Ningbo City, Zhejiang Province, P.R. China

P.C:315333