Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 21/06/05'		LJC 21/06/05'
B	DRAWING UPDATE	JLZ 09/04/18'		

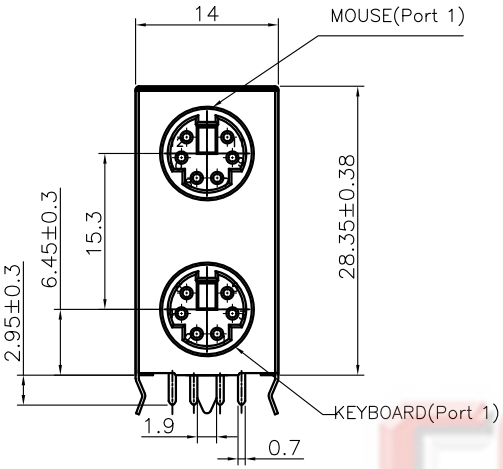

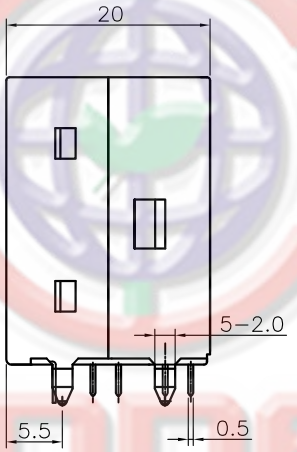

NOTES:

1. SPECIFICATIONS:
   - 1.0 VOLTAGE RATING: 30V DC.
   - 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
   - 1.2 CONTACT RESISTANCE: 100 MILLIOHMS MAX.
   - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   - 1.4 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
   - 1.5 OPERATING TEMPERATURE: −40°C ~ +105°C.
2. PRODUCT NUMBER CODE:

DS1094 − X X X X X

- Contact plating: 0: Selective Gold Flash
- No.of contacts: 6: 6pin
- Shell PLATING: N: Nickel
- COLOR OF HOUSING(Port 1): G: Green
- COLOR OF HOUSING(Port 2): P: Purple

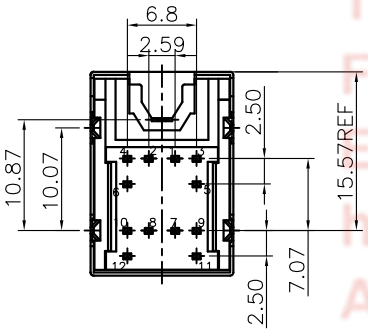

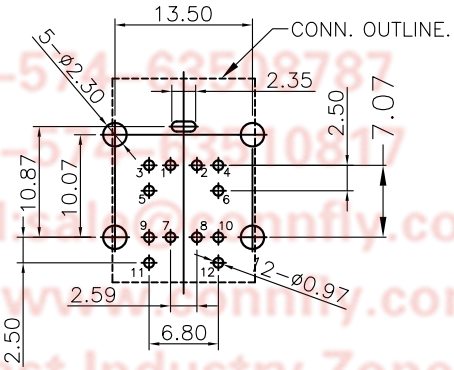

RECOMMENDED P.C.B LAYOUT (TOLERANCE:±0.05)
THICKNESS=1.6mm <COMPONENT SIDE>

CONNFLY®
Tel:86-574-63598787
Fax:86-574-63591087
E-mail:sales@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1094-XXXXX-B		

PROJECTION		TITLE	MINI DIN TYPE STACK
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1094 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.