

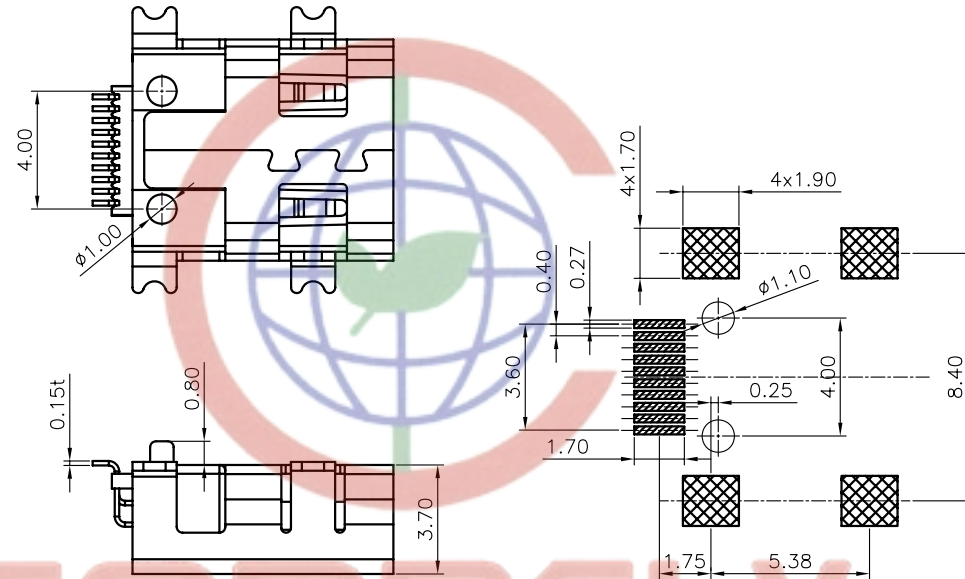


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/01/11'		



Recommend PCB Layout  
Tolerance=±0.03

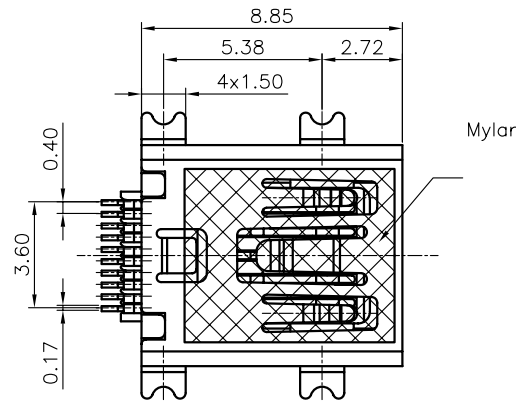

NOTES:

1.SPECIFICATIONS

- .CURRENT RATING: 0.5A/pin Max.
- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min.
- .TEMPERATURE RANGE: -40°C+105°C


2.MATERIALS

- .HOUSING: High temperature plastic,UL94 V-0,Color of black.
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.

3.PRODUCT NUMBER CODE:

- DS1104-04 - X X X X X
- X Packing Type
  - R Tape On Reel
  - B Tube
  - Mylar Support
  - S W/ Mylar
  - X W/O Mylar
  - Contact plating
  - 0 Selective gold flash
  - C Selective 3u" gold
  - 3 Selective 30u" gold
  - Shell plating
  - 6 Full Matt Tin
  - N Full Nickel
  - 8 Full Gold
  - Color of housing
  - B BLACK

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	MINI USB 10 Positions FEMALE SMT TYPE
X. ±0.60	X. ±5°	UNITS mm	SHEET SIZE A4	SERIES DS1104-04 SERIES
.X ±0.38	.X ±3°			
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER		Add East Industry Zone, Changyan	
SCALE 1:1	SHEET 1 OF 1	C-DS1104-04-XXXXX		
DRAWING NO.	C-DS1104-04-XXXXX			


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com