

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/09/15'	~	

NOTES:

- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: STEEL.
- 1.7 HOOK: STEEL.
- 1.8 PRODUCT NUMBER CODE:





DS1105-05 - X X X X

4,5PIN TYPE
A:Cutting-out
B:Open circuit

CONTACT PLATED:
0: Selective Gold Flash
C: Selective Gold 3u"
3: Selective Gold 30u"

SHELL PLATED:
N: Nickel

COLOR OF HOUSING:
B: Black

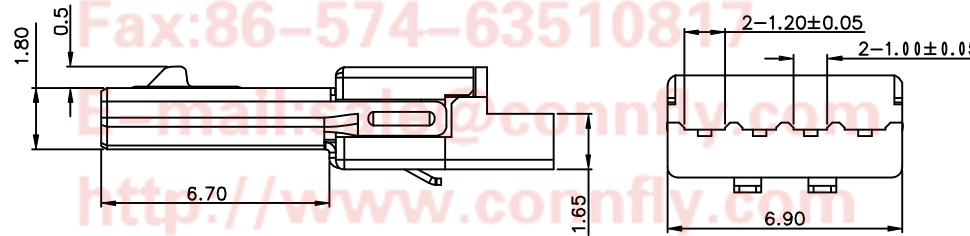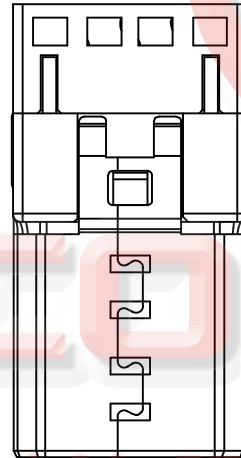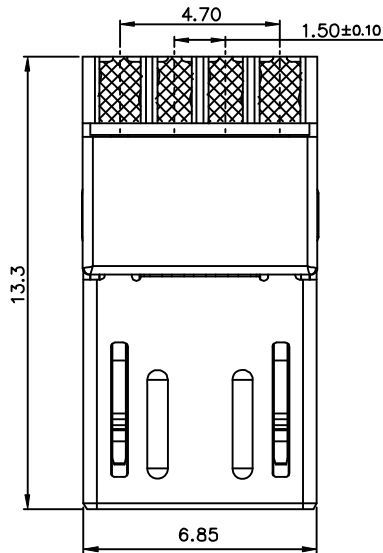

Tel:86-574-63508787

Fax:86-574-63510817

E-mail: info@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan


Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X. ±0.60	X. ±5°	
.X ±0.38	.X ±3°	
.XX ±0.25	.XX ±2°	

PROJECTION	TITLE	MICRO USB MALE
UNITS mm		5P(Front 5 Back 4) SOLDER TYPE
SHEET SIZE A4	SERIES DS1105-05 SERIES	

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. C-DS1105-05-XXXX-A	

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD