

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/09/15'	~	

NOTES:

- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: COPPER ALLOY
- 1.7 PRODUCT NUMBER CODE:

DS1105-07 - X X X X X


PACKING TYPE:
R: Tape on reel
B: Tube

POST SUPPORT:
X: W/O Post
S: W/ Post

CONTACT PLATED:
0: Selective Gold Flash
C: Selective Gold 3u"

SHELL PLATED:
N: Nickel
6: Tin
8: Full Gold


COLOR OF HOUSING:
B: Black

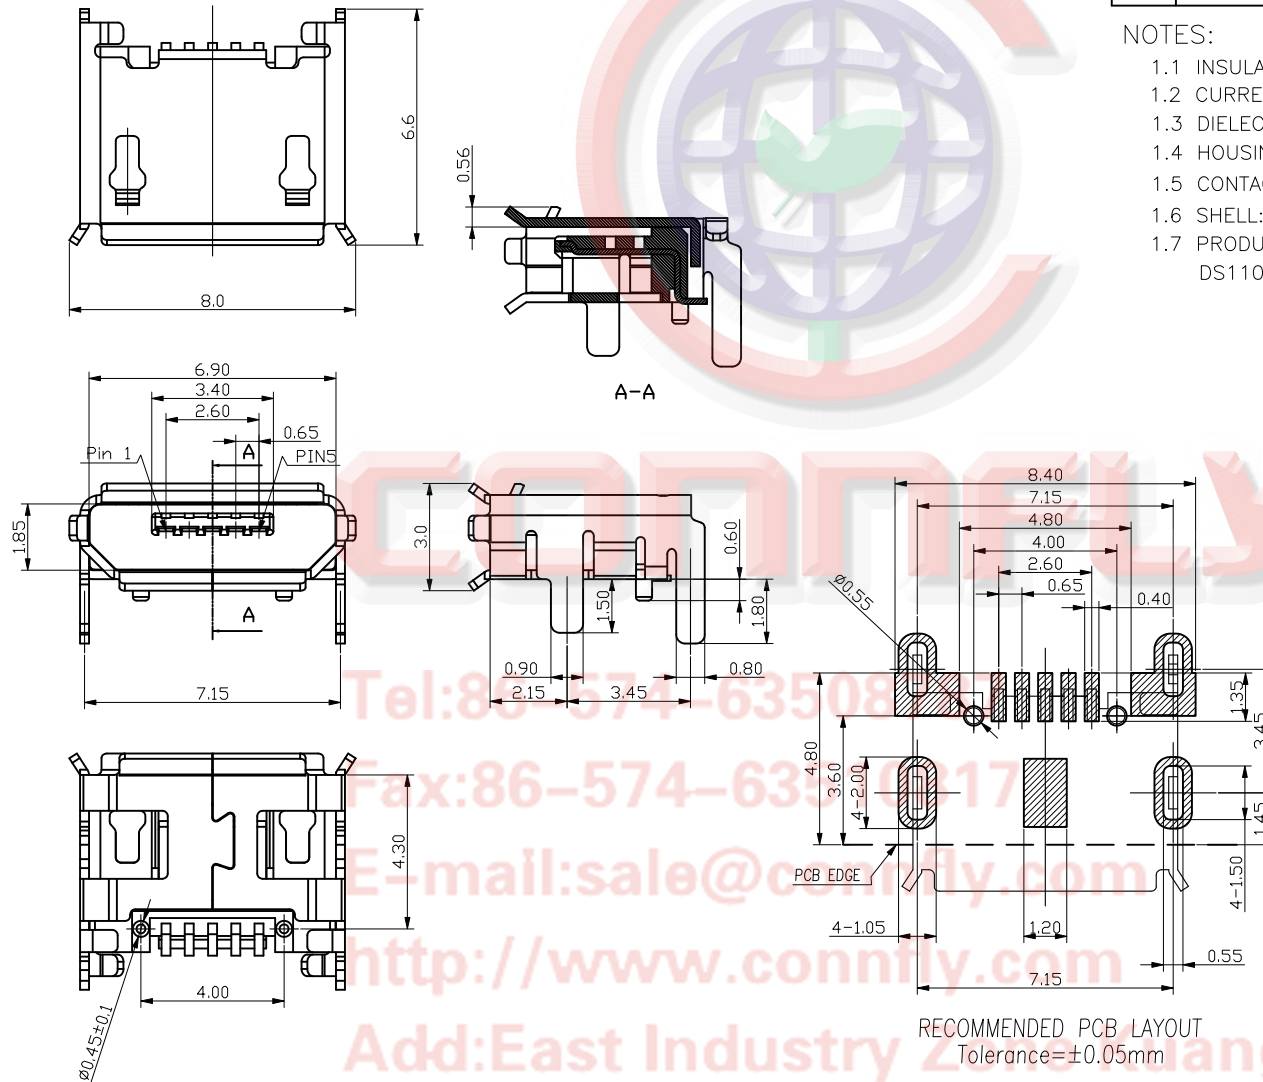

RECOMMENDED PCB LAYOUT
Tolerance=±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1105-07-XXXX-A	

PROJECTION	TITLE	MICRO USB B TYPE FEMALE	
UNITS	mm	5P DIP+R/A SMT W/ POST TYPE	
SHEET SIZE	A4	SERIES	DS1105-07 SERIES

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508117
Fax:86-574-63508117
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone HuangYan
Town Cixi Ningbo China
P.C:315333