


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 19/07/05		

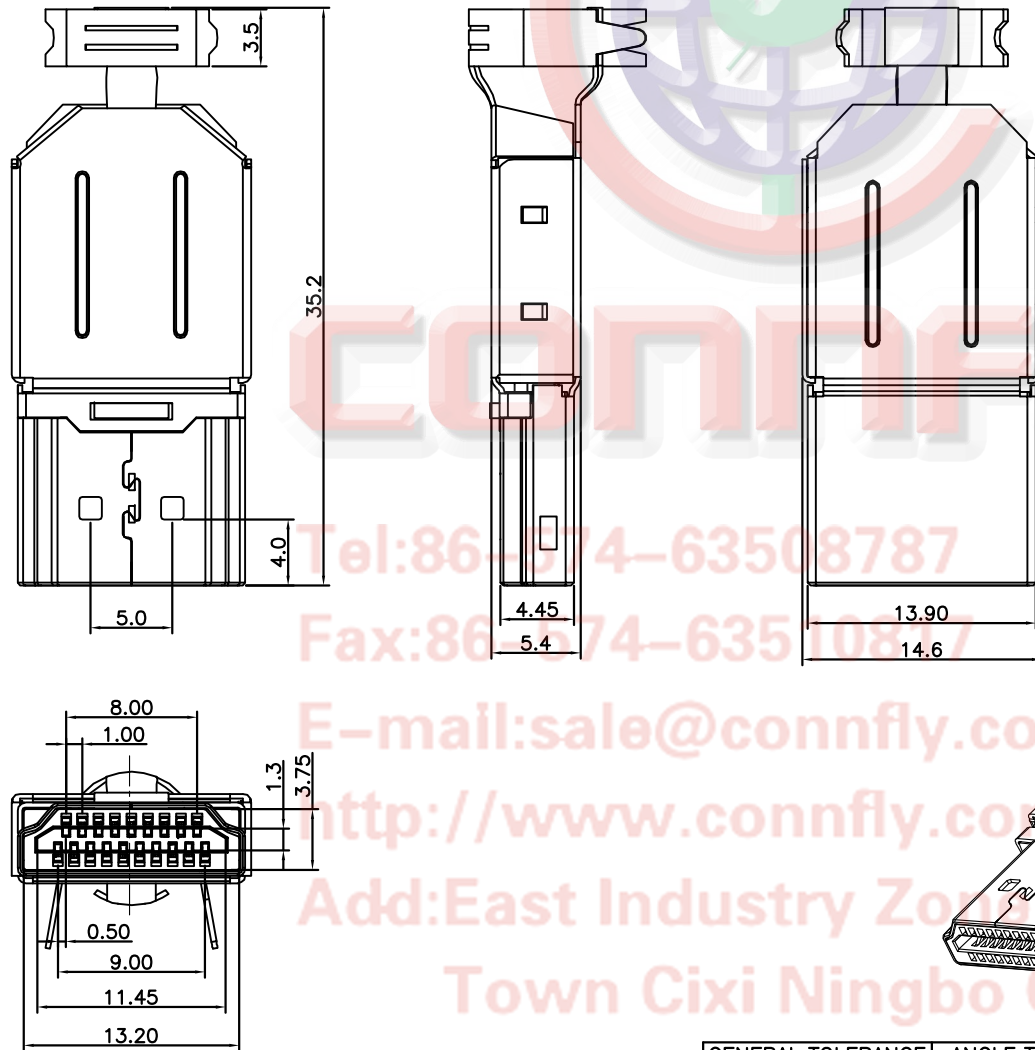

NOTES:

1. MATERIALS

- . Insulator: thermoplastic, UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy


2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -40°C to +105°C.

3. PRODUCT NUMBER CODE:

DS1116 - X X X

- Contact plating
 - 0: selective gold flash
 - C: selective 3u" gold
 - 1: selective 10u" gold
- Shell plating
 - 6: Tin
 - N: Nickel
- Color of housing
 - B: Black

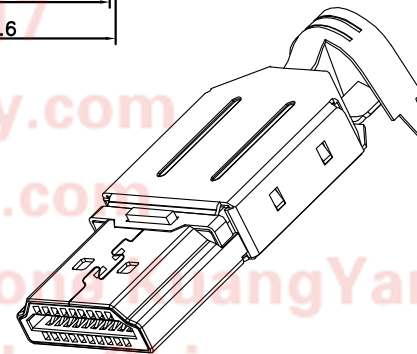

Tel: 86-574-63508787
 Fax: 86-574-6351087
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone, Jiangyan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	HDMI 19PIN MALE Solder type WITH BACK SHELL
X. ±0.60	X. ±5°	UNITS	mm	SERIES	DS1116
.X ±0.38	.X ±3°	SHEET SIZE	A4		
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1116-XXX				

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD