




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/05/17'	~	

NOTES:


- Electrical Characteristics:
 - Contact Resistance: 50mΩ Max.
 - Dielectric Withstanding Voltage: 500V AC(rms) for 1 minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating:1.5A.
 - Voltage Rating:125V AC RMS.
- Environment Characteristics:
 - Temperature: -40°C~+85°C.
- Materials
 - Contact: Copper Alloy,Gold Flash.
 - Insulator Material: PBT or Nylon,Black.
- Product Number Code:

DS1128-11 - X X X X X

- Housing Materials
P:PBT
N:Nylon
- Contact Plating
8:Gold Flash
- Housing Color
B:Black
- No.Of Contacts
8:8p8c
- Connector Type
S:Socket

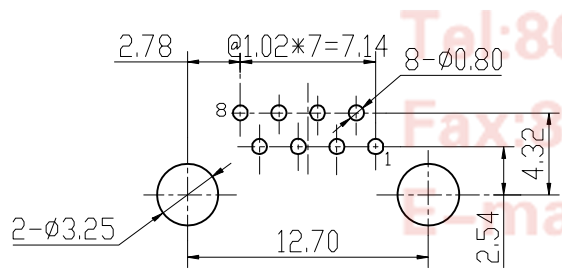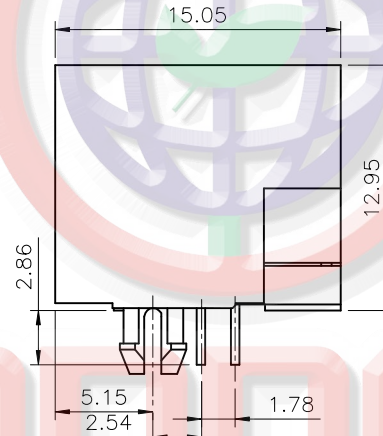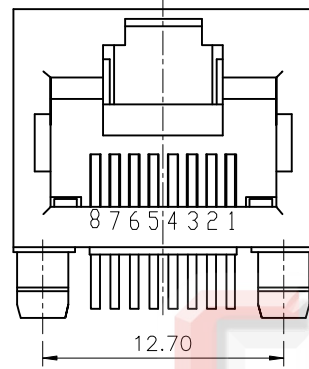

PC BOARD LAYOUT
THICKNESS=1.6mm

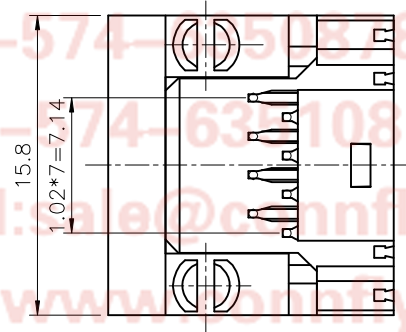

Tel:86-574-6351837
 Fax:86-574-63510817
 E-mail:sales@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 8P 1PORT W/O Shell 2.54mm After of Post Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1128-11 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNLY ELECTRONIC CO. LTD		
DRAWING TYPE		CUSTOMER				
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1128-11-XXXX-A				