
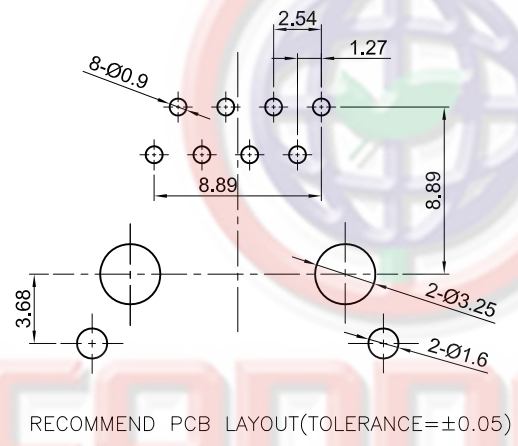
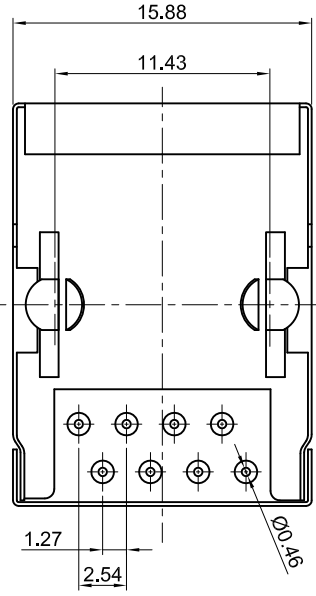



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		LJC 03/26/06'
B	DRAWING UPDATE	JLZ 10/27/18'		

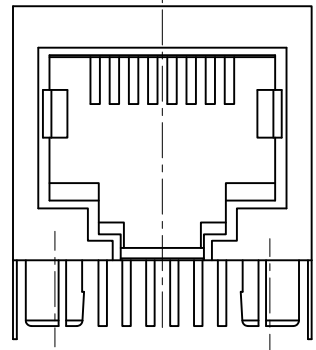

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

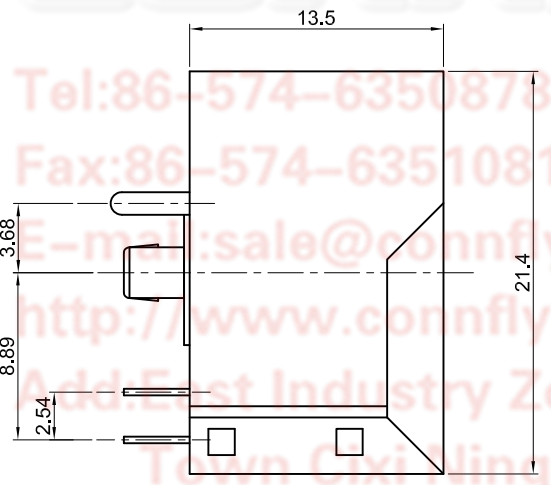


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 30MΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ MIN.
  - CURRENT RATING:1.5A.
  - VOLTAGE RATING:125V AC RMS.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS:
  - CONTACT MATERIAL: COPPER ALLOY,GOLD FLASH.
  - SHEEL MATERIAL: COPPER ALLOY, NICKEL PLATED.
  - INSULATOR MATERIAL: PBT,BLACK,UL94-V0.
- PRODUCT NUMBER CODE:

DS1128-X X X X

Housing Materials	P:PBT N:Nylon
Housing Color	B:Black
Contact Plating	0:Full Gold Flash
No.Of Contacts	4:8p4c 6:8p6c 8:8p8c
Connector Type	S:Socket



GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1128-XXXXX-B		

PROJECTION		TITLE	PCB JACK 8P 1PORT
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1128 SERIES




**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		LJC 03/26/06'
B	DRAWING UPDATE	JLZ 10/27/18'		

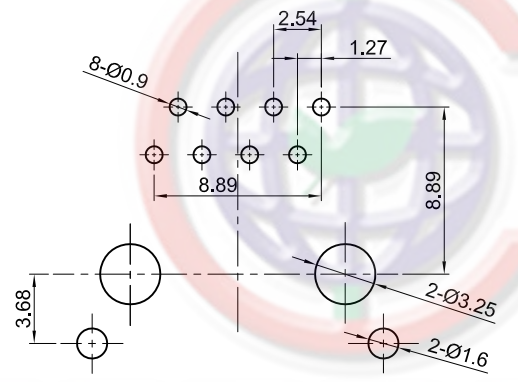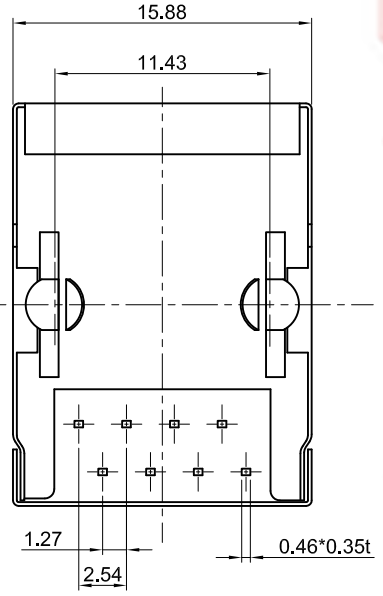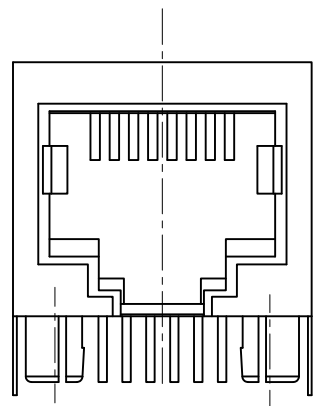


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

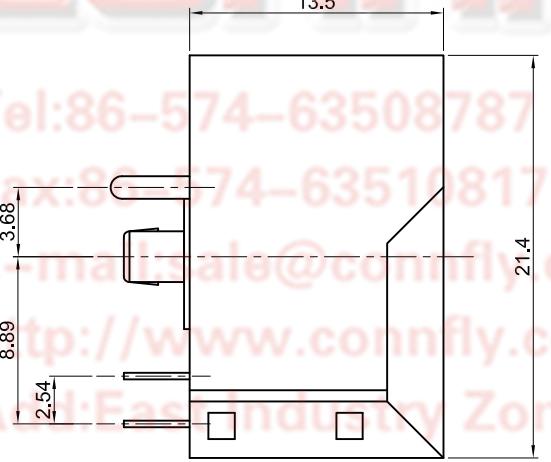

**NOTES:**

- ELECTRICAL CHARACTERISTICS:**
  - CONTACT RESISTANCE: 30MΩ MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ MIN.
  - CURRENT RATING:1.5A.
  - VOLTAGE RATING:125V AC RMS.
- ENVIRONMENT CHARACTERISTICS:**
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS:**
  - CONTACT MATERIAL: COPPER ALLOY,SELECTIVE GOLD.
  - SHEEL MATERIAL: COPPER ALLOY, NICKEL PLATED.
  - INSULATOR MATERIAL: PBT,BLACK,UL94-V0.
- PRODUCT NUMBER CODE:**

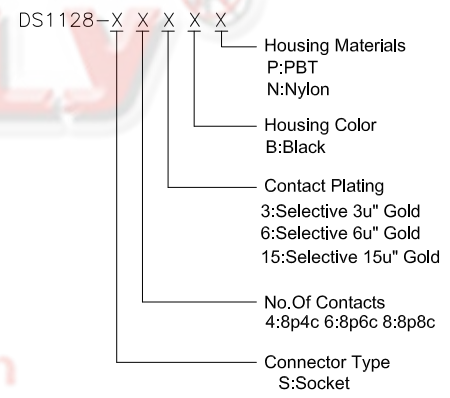

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 8P 1PORT
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1128 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
DRAWING TYPE		CUSTOMER				
SCALE		1:1 SHEET 2 OF 2				
DRAWING NO.		C-DS1128-XXXXX-B				

1                      2                      3                      4                      5                      6                      7                      8