




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 07/07/07'	~	

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

DS1129-01-X X X X X

- Housing Materials  
P:PBT  
N:NYLON
- Housing Color  
B:Black
- Contact Plating  
0:Gold Flash  
3:Selective 3u" Gold  
(6;15;30)Micro Inch
- No.Of Contacts  
4:8p4c 6:8p6c 8:8p8c
- Connector Type  
S:Socket
- Series No.  
DS1129-01

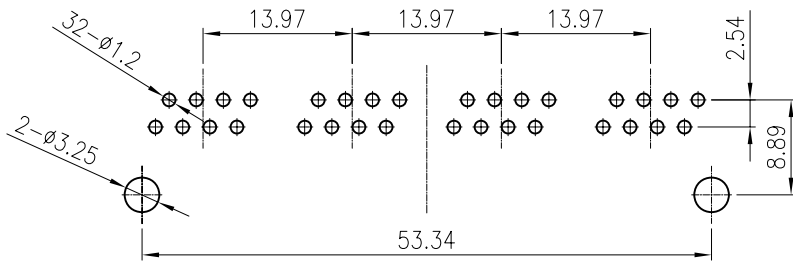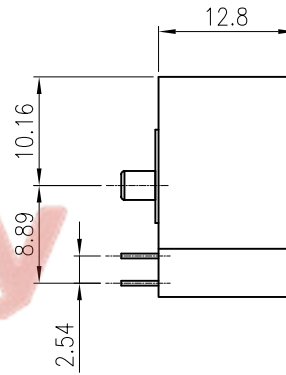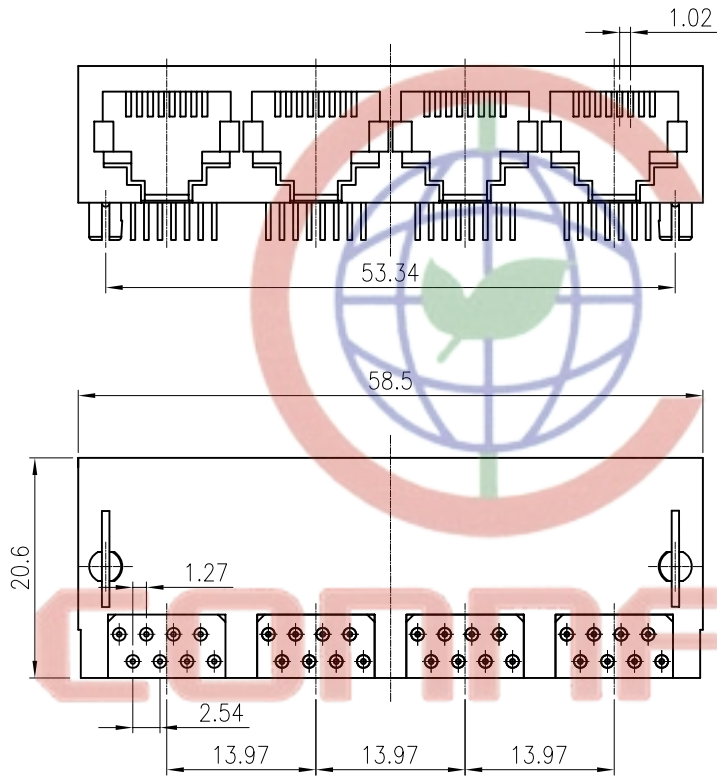

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhongqin.com.cn

Http://www.connfly.com

8: 8p8c  
Bottom View

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 8P 4PORT W/O SHELL
X	±0.60	X	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°			SERIES	DS1129-01 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1129-01-XXXXX					