



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 02/20/17'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING:125V.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: SELECTIVE GOLD.
 - INSULATOR MATERIALS: PBT BLACK.
- PRODUCT NUMBER CODE:

DS1129-08-X X X X X X X

- LED Type
 - 1:LED1 Green LED2 Yellow
 - 2:LED1 Yellow LED2 Green
- Shell Type
 - S:W/ Shrapnel
 - X:W/O Shrapnel
- Housing Materials
 - P:PBT
- Contact Plating
 - 0:Selective Gold Flash
 - 3:Selective 30u" gold
 - 4:Selective 3u" gold
 - 5:Selective 15u" gold
- Housing Color
 - B:Black
- No.Of Contacts
 - 8:8p8c
- Connector Type
 - S:Socket

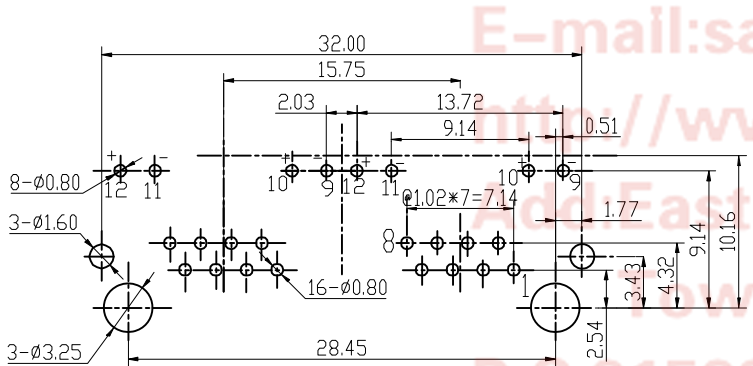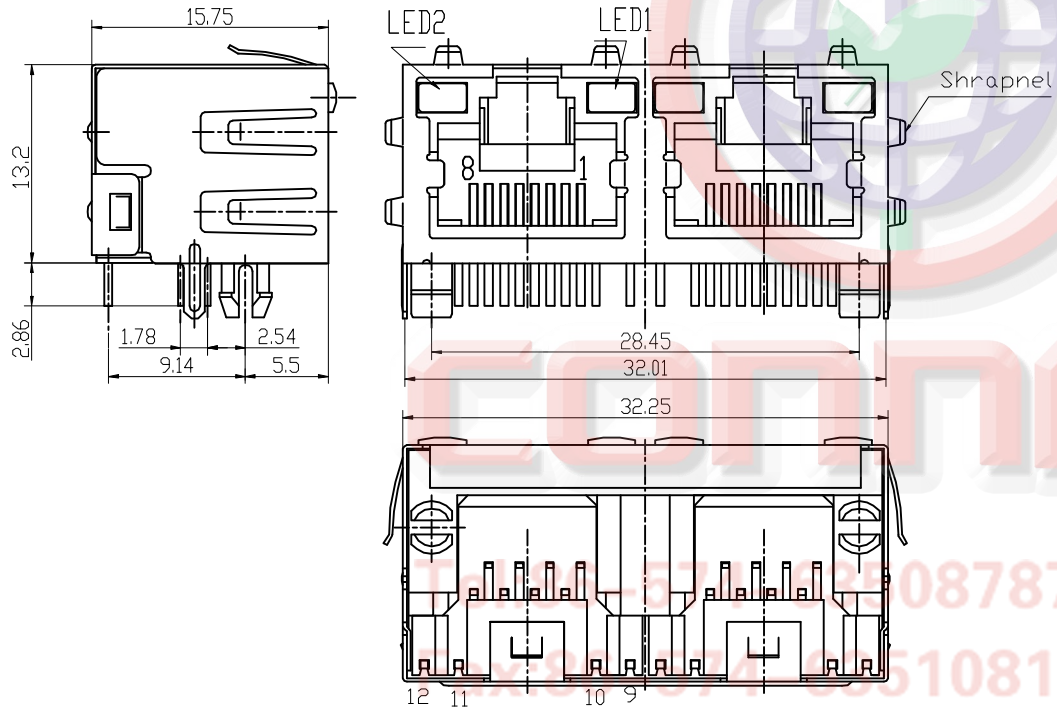

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1129-08-XXXXXXX-A		

PROJECTION	TITLE
mm	PCB Jack 8 Positions 1*2 Port W/ Shell 3.43mm WITH LED Type
SHEET SIZE	SERIES
A4	DS1129-08 SERIES

CONNFLY 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

57162808787
 57162808787
 E-mail:sale@connfly.com
<http://www.connfly.com>
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333