
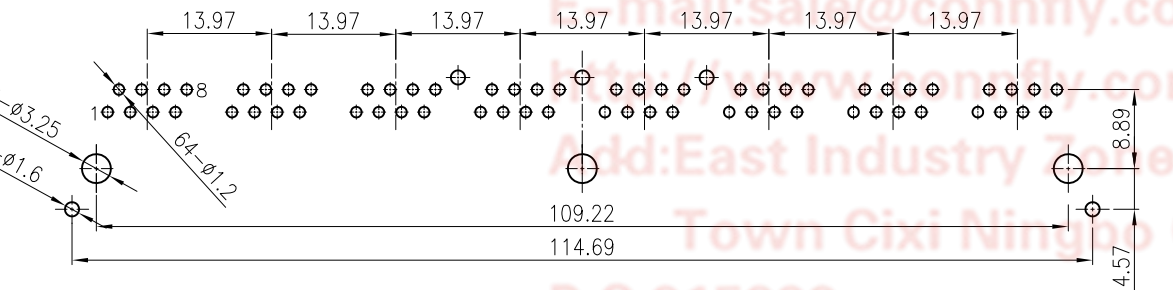
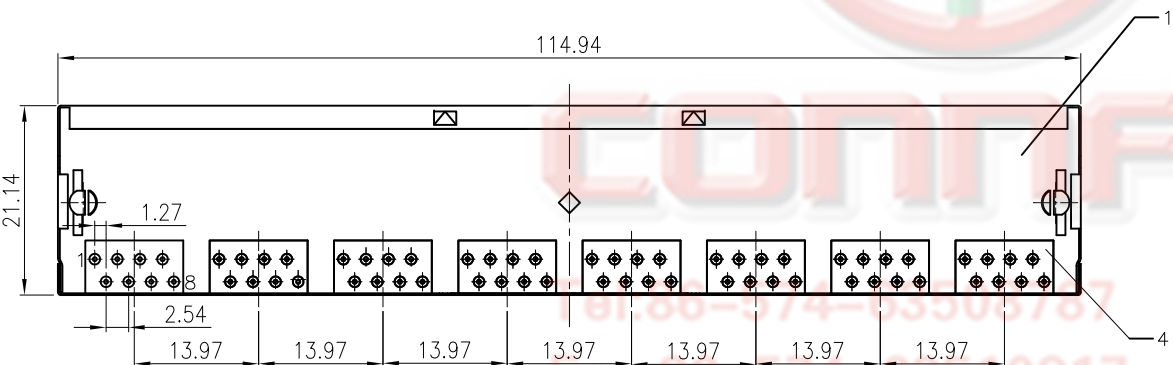


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		LJC 03/26/06'
B	DRAWING UPDATE	JLZ 06/01/18'		

SPECIFICATION

- Insulation Resistance:1000MΩ Min.
 - Withstand Voltage:500V AC/Minute.
 - Durability:600 Cycles Min.
 - Product Number Code:
DS1130-X X X X X
- Housing Materials
P:PBT
N:NYLON
 - Housing Color
B:Black
 - Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
 - No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
 - Connector Type
S:Socket
 - Series No.
DS1130

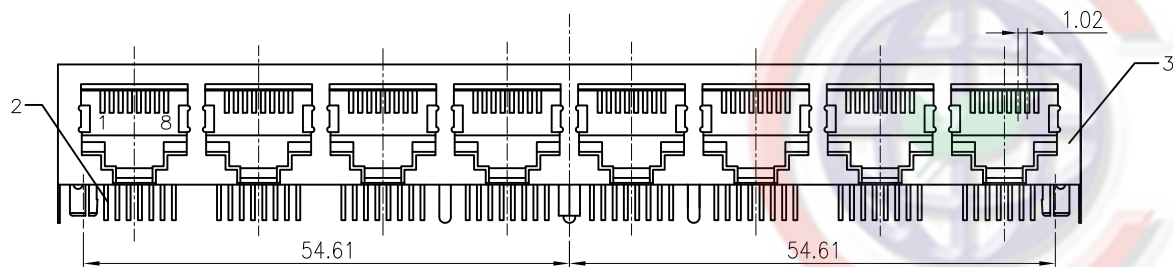

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

No.	PART NAME	QTY	MATERAIL	REMARK
(4)	COVER	8	PBT OR NYLON	UL94 V-0
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN	1	PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1130-XXXXX-B		

PROJECTION	TITLE
	PCB JACK 8 PORT
UNITS	mm
SHEET SIZE	A4
SERIES	DS1130 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD