

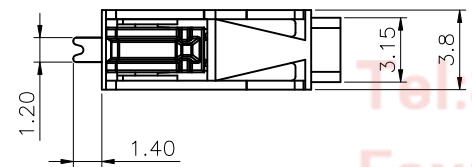

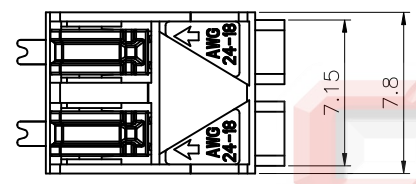
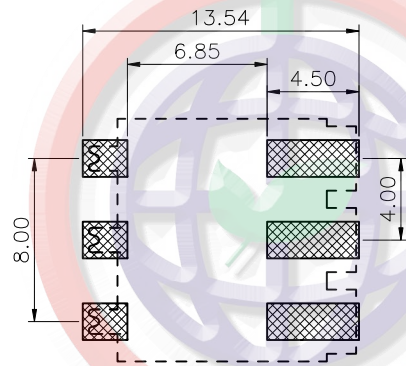
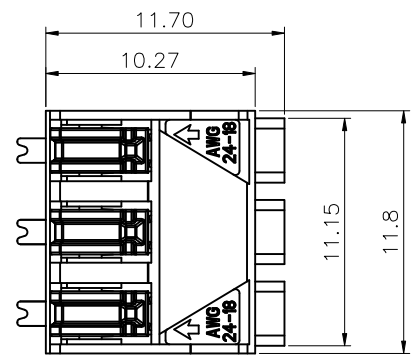


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-----------------|---------------|---------------|---------------|
| A | NEW RELEASE | YCH 01/24/14' | ~ | LJC 01/24/14' |
| B | Terminal Change | JLZ 02/26/15' | HZW 02/26/15' | LJC 02/26/15' |
| C | DRAWING UPDATE | JLZ 03/18/17' | ~ | |

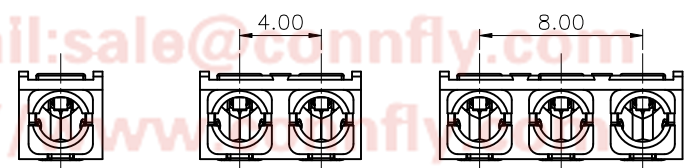

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

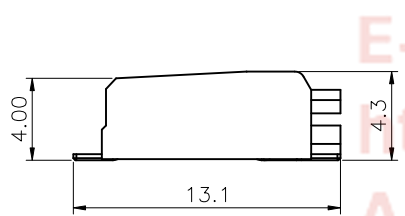

NOTES:

1.Materials:

- 1.1. Insulator: High Temperature ,UL94 V-0 Rated, RoHS,REACH compliance.
- 1.2. Contact: Copper Alloy, Plating Matt Tin .

2.Specifications:

- 2.1. Temperature Range: -45~+105°C.
- 2.2. Contact Resistance: 20mΩ maximum.
- 2.3. Insulation Resistance: 1000MΩ minimum.
- 2.4. Voltage Rating: 320V AC/DC.
- 2.5. Current Rating: 9A max per pin.
- 2.6. Application wire range:

- 1.single solid wire: 0.2-0.75mm².
- 2.stranded type wire: 24-18AWG.

2.7. Resistance to soldering heat: 260°C,3-5seconds.


3.Packing Type: Tape on reel,1P: 1500pcs/Reel,2P: 1000pcs/Reel, 3P: 750pcs/Reel.

4. Product Number Code:

DS1137-10 - X X X X X

- Packing Type
- R: Tape On Reel.
- Pin plating
- 6: Full matt tin.
- Housing Color
- A: Gray
- Connector Type
- F: Female
- No. of positions
- 01: 1p
- 02: 2p
- 03: 3p

Tel:86-574-63503787
 Fax:86-574-63503817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 15333

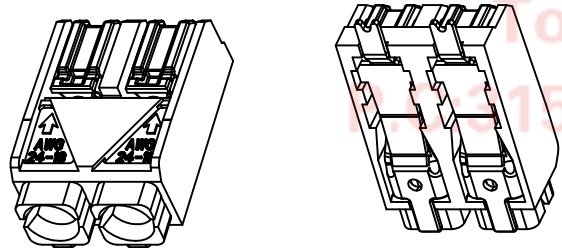

| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
|-------------------|-------|-----------------|-----|
| X. | ±0.60 | X. | ±5' |
| .X | ±0.38 | .X | ±3' |
| .XX | ±0.25 | .XX | ±2' |

| | | | |
|--------------|----------|-------|--------|
| DRAWING TYPE | CUSTOMER | | |
| SCALE | 1:1 | SHEET | 1 OF 1 |
| DRAWING NO. | | | |

| | | | |
|------------|----|--------|-------------------------|
| PROJECTION | | TITLE | 4.00mm LED Series |
| UNITS | mm | | Terminal Block SMT Type |
| SHEET SIZE | A4 | SERIES | |

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD