
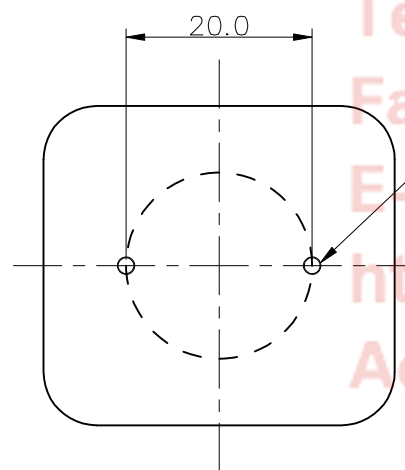


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/27/14'	~	

- NOTES:**
- Materials:**
 - Housing: PBT 30% GF, UL94 V-0 Rated.
 - Contact: Copper Alloy, Plating Gold Over Nickel.
 - Wire: UL 3266 125°C 20AWG (Stranded).
 - Specifications:**
 - Voltage-Max: 600V DC.
 - Application wire range:
 - stranded type wire: 20AWG (UL 3266).
 - Mount holder using M2.5 screws (2), 0.1 N/m min 0.2 N/m max torque.
 - Product Number Code:**

DS1137-12 - X X X X X X

- Wire Length (Dim L)
100: 100mm
999: 999mm
- Wire Color
W: White B: Black
L: Blue R: Red
G: Green Y: Yellow
N: Brown E: Orange
P: Purple
- Contact plating
8: Full gold flash.
- Housing Color
W: White
- Connector Type
F: Female
- No. of positions
02: 2p

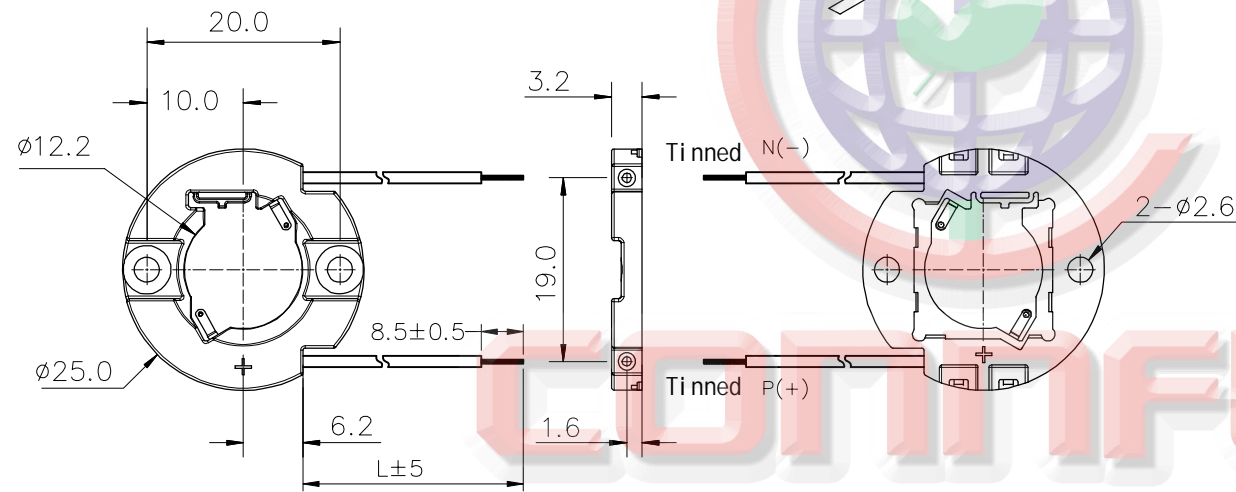

RECOMMENDED MOUNTING DIMENSIONS

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 31533

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	C-DS1137-12-XXXXXX-A

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1137-12 SERIES


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD