



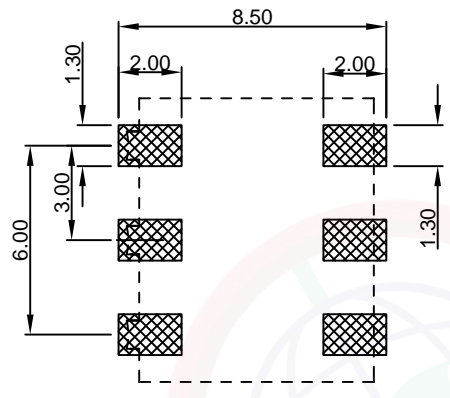






Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/05/20'		
B	DRAWING UPDATE	JLZ 03/26/22'		

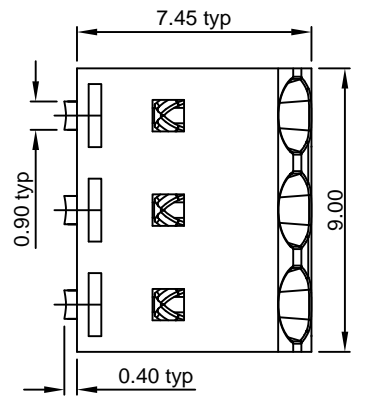

Recommend PCB layout
Tolerance:±0.05mm



NOTES:

- Materials:
 - Insulator: High Temperature ,UL94 V-0 Rated, RoHS,REACH compliance.
 - Contact: Copper Alloy, Plating Tin .
- Specifications:
 - Temperature Range: -40°C~+105°C.
 - Contact Resistance: 20mΩ maximum.
 - Insulation Resistance: 1000MΩ minimum.
 - Voltage Rating: 320V AC/DC.
 - Current Rating: 3A max per pin.
 - Application wire range:
 - single solid wire: 0.14-0.34mm².
 - stranded type wire: 26-22AWG.
 - Resistance to soldering heat: 260°C,3-5seconds.
- Product Number Code:

DS1137-16 - X X X X X

- X Packing Type
- R Tape On Reel.
- Pin plating
- 6: Matt tin.
- Housing Color
- V: Ivory
- Connector Type
- F: Female
- No. of positions
- 01: 1p
- 02: 2p
- 03: 3p



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1137-16-XXXXX-B		

PROJECTION		TITLE	3.00mm LED Series
UNITS	mm		Terminal Block SMT Type
SHEET SIZE	A4	SERIES	DS1137-16 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD