


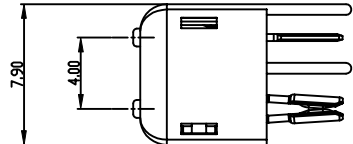


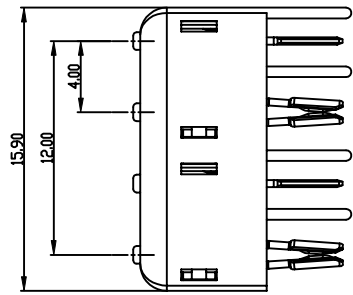
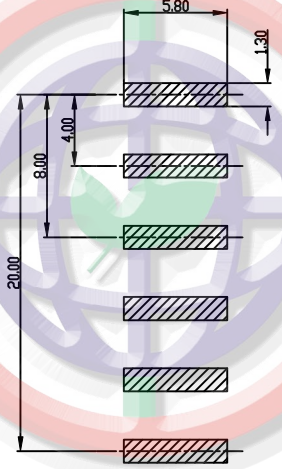
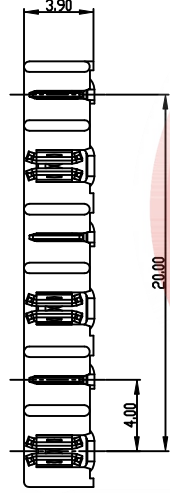



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Kevin 01/07/15'	~	

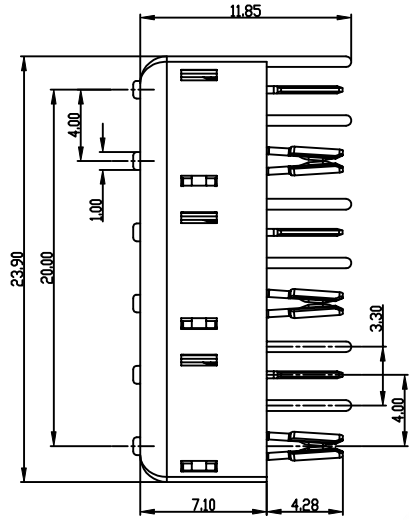

NOTES:
 1. Materials:
 1.1. Insulator: High Temperature ,UL94 V-0 Rated, RoHS,REACH compliance.
 1.2. Contact: Copper Alloy, Plating Tin .
 2. Specifications:
 2.1. Temperature Range: -40°C~+105°C.
 2.2. Contact Resistance: 20mΩ maximum.
 2.3. Insulation Resistance: 1000MΩ minimum.
 2.4. Voltage Rating: 320V AC/DC.
 2.5. Current Rating: 3A max per pin.
 2.6. Resistance to soldering heat: 260°C,3-5seconds.
 3. Product Number Code:

DS1137-17 - X X X X X

- Packing Type
- R: Tape On Reel.
- Pin plating
- 6: Full tin.
- Housing Color
- A: Gray
- Connector Type
- F: Female
- No. of positions
- 01: 1p
- 02: 2p
- 03: 3p

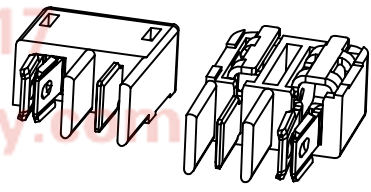

1PIN 3D VIEW

RECOMMEND P.C.B LAYOUT
 TOLERANCE=±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE	
.X	±0.60	.X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	4.00mm LED Series Terminal Block SMT Type	
UNITS	mm		
SHEET SIZE	A4	SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

CONNFLY 晨翔电子有限公司
CONNFLY ELECTRONIC CO., LTD

CONNFLY
 Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industrial Zone KuangYan
 Town Cixi Ningbo, China
 P.C: 315333