


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/25/16'		
B	DRAWING UPDATE	JLZ 12/12/16'		
C	DRAWING UPDATE	QHZ 03/04/19'		

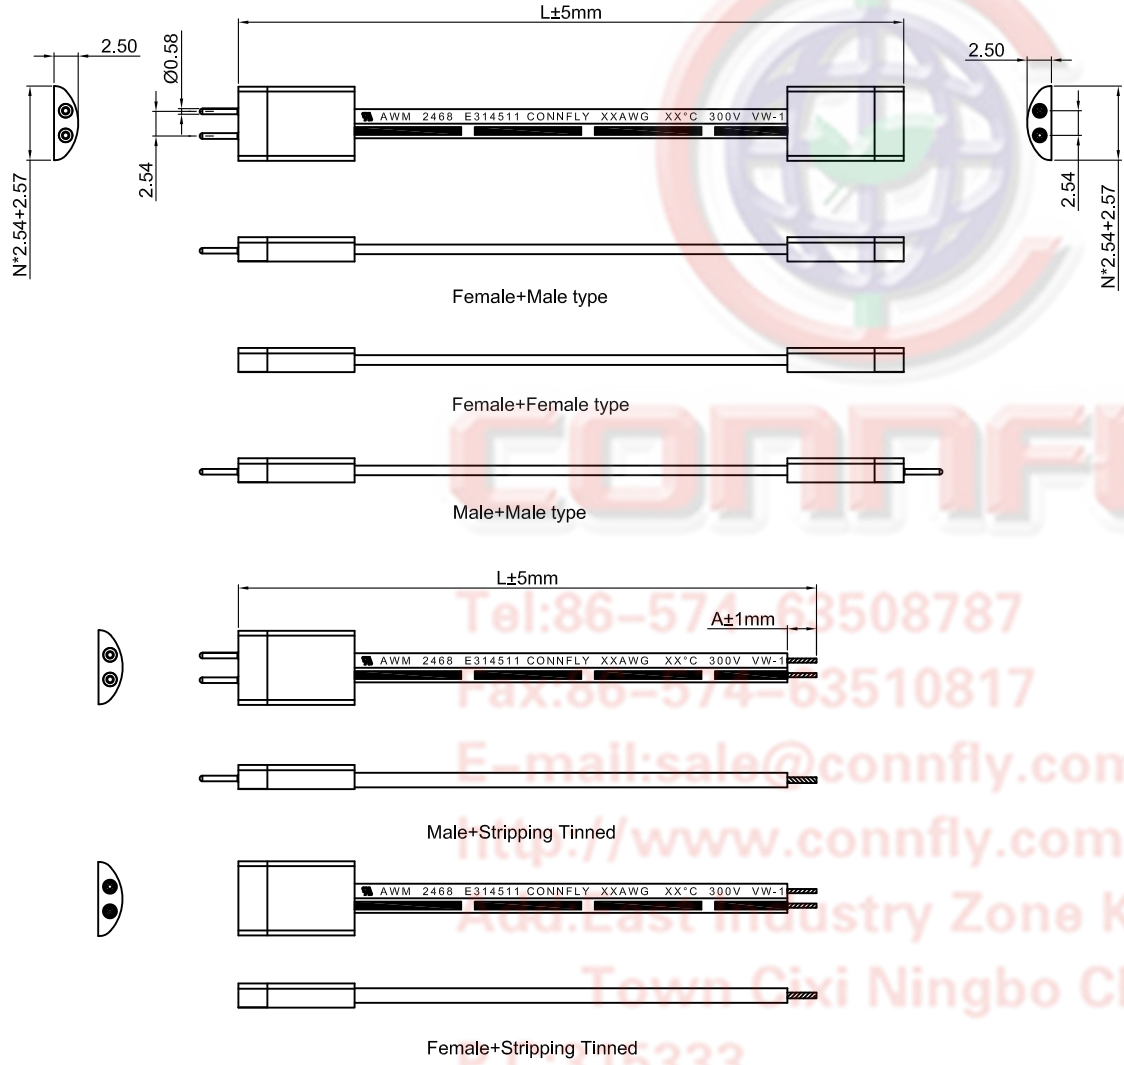

- NOTES:
- Materials:
 - Insulator: PBT Colour:White or Black,UL94 V-0. Rated,RoHS,REACH compliance.
 - Contact: Copper Alloy, Plating Tin or Gold .
 - Specifications:
 - 2.1. Contact Resistance: 200mΩ maximum.
 - 2.2. Dielectric Withstanding Voltage: 1000V AC 1 minute.
 - 2.3. Insulation Resistance: 500MQ minimum.
 - 2.4. Temperature Range: -40°C~+105°C.
 - 2.5. Durability: 1000 cycles min.
 - 2.6. Application wire range:AWG26~24
 - Product Number Code:
 - DS1137-24 - X X X X X X X X X X
 - Clip Plating(Female Only)
 - 8: Full gold flash.
 - C: Full 3u" gold.
 - Mark Color of Wire
 - R:Red
 - L:BLUE
 - Wire Length(Dim A)
 - 03: 3mm
 - 05: 5mm
 -
 - Wire Length(Dim L)
 - 080: 80mm
 - 180: 180mm
 -
 - Housing Color
 - W: White
 - B: Black
 - Pin Plating
 - 6: Full tin.
 - 8: Full gold flash.
 - Mounting Type
 - W: Solder type
 - Wire Gauge
 - 24:UL2468 24AWG
 - 26:UL2468 26AWG
 - Connector Type
 - F: Female+Female
 - M: Male+Male
 - X: Male+Female
 - FC: Female+Stripping Tinned
 - MC: Male+Stripping Tinned
 - No. of positions
 - 2: 2p 3: 3p 4: 4p

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C.315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm LED Series Plug & Socket	
X.	±0.60	X.	±5°	UNITS	mm	Solder Wire Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1137-24 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1137-24-XXXXXXX-C						