
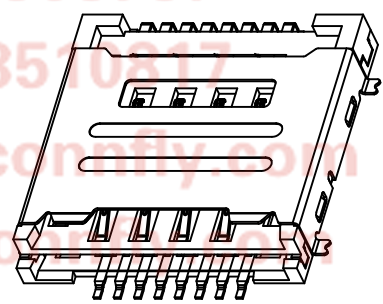
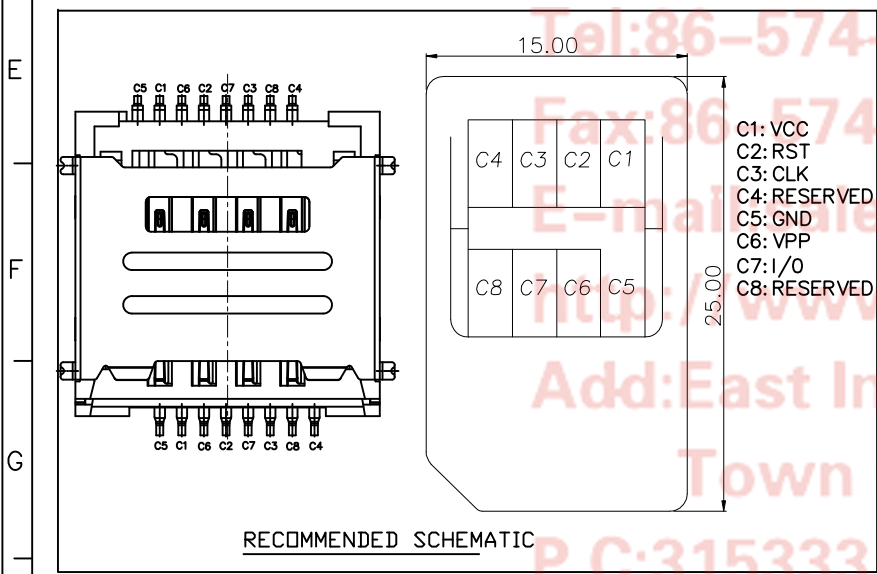
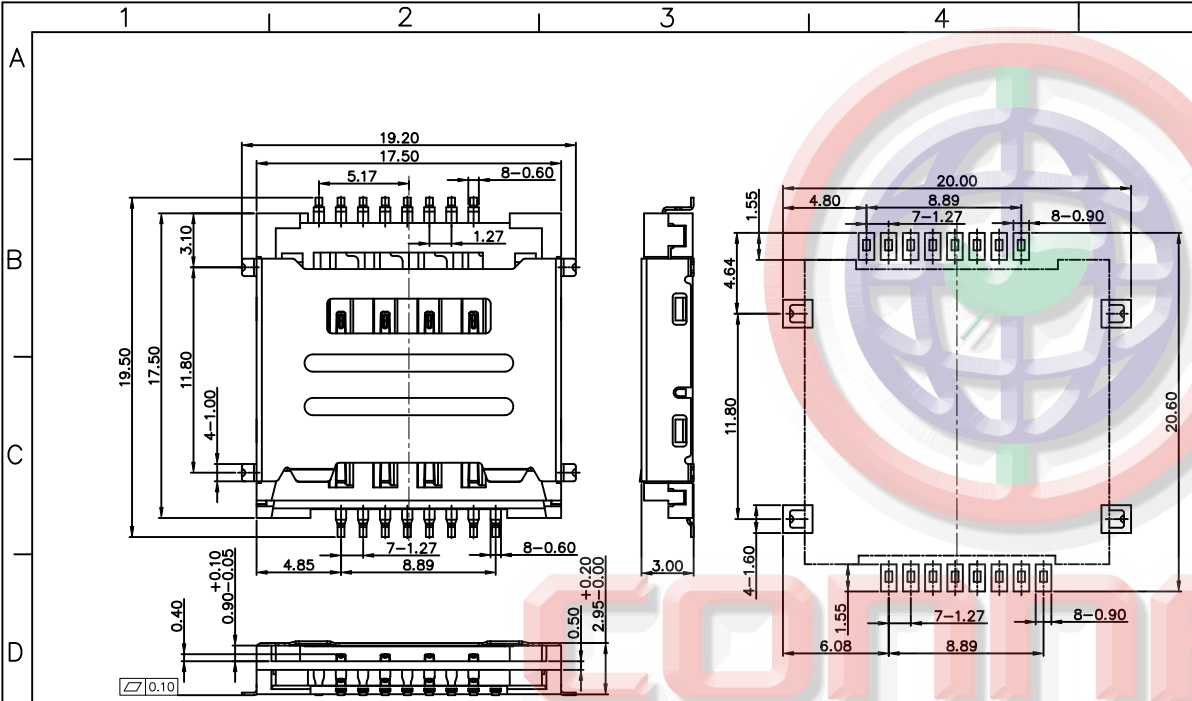


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/08/14'		LJC 10/08/14'
B	ARRANGEMENT DRAWING	JLZ 11/06/15'		

- Notes
- Material:
 - Housing: High Thermoplastic LCP UL 94v-0 Color Of Black.
 - Contacts: Copper Alloy.
 - Shell: Stainless Steel
 - Finish:
 - Contact Area: Gold Over Nickel.
 - Solder Area: Matte Tin.
 - Specifications:
 - Operation Temperature: -40° C TO +85° C.
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 50mΩ max.
 - Withstanding Voltage: 500V AC 1 Min.
 - Voltage Rating: 30V AC/DC.
 - Current Rating: 1.0A.
 - Product Numbrt Code:

DS1138-03 - XX X X X X X X

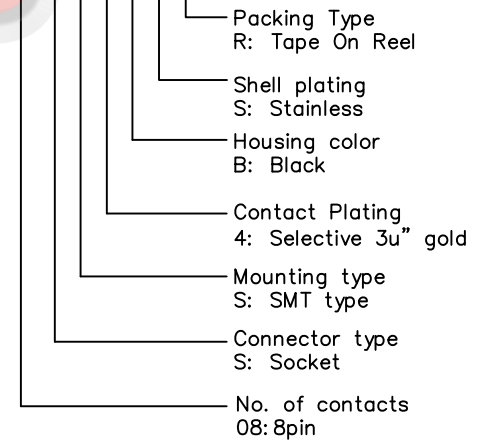

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:connfly@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm SIM Card H=3.0mm 8P Dual SMT Type			
X.	±0.60	X.	±5°	UNITS	mm					
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1138-03 SERIES			
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD					
SCALE		1:1	SHEET						1 OF 1	
DRAWING NO.		C-DS1138-03-XXXXXXX-B								