
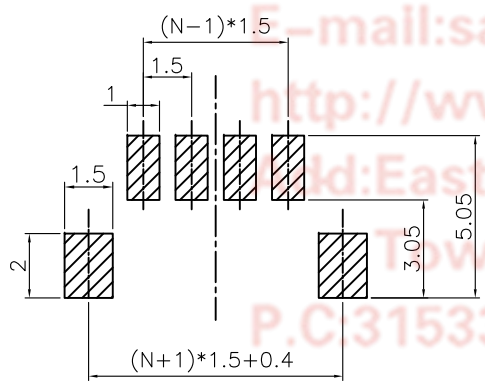

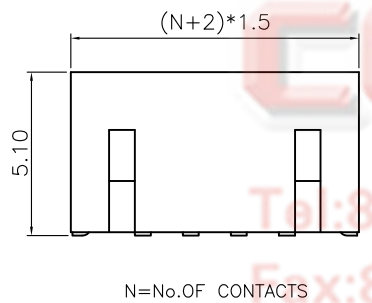


Dept
 Qty
 DC 1
 ED 1
 IE 1
 ISO 1
 PD 1
 R&D 1
 SD 1
 QA 1
 QC 1
 QE 1
 The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/04/18'		

- NOTES:
- CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 500MΩ Min.
 - CURRENT RATING: 1A.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -25°C~+85°C.
 - MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: TIN.
 - INSULATOR MATERIALS: HIGH TEMP, NATURAL.
 - PRODUCT NUMBER CODE:
 DS1147-09 - X X X X X X X X
 - CONTACT TYPE
 - A: UPRIGHT TYPE
 - PACKING TYPE
 - B: TUBE
 - R: TAPE ON REEL
 - PICK UP SUPPORT
 - S: W/ PICK UP
 - X: W/O PICK UP
 - HOUSING COLOR
 - V: IVORY
 - CONTACT PLATING
 - 6: FULL TIN
 - MOUNTING TYPE
 - S: SMT TYPE
 - CONNECTOR TYPE
 - M: MALE
 - No.OF CONTACTS
 - 02~15

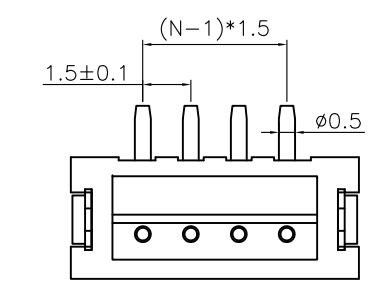

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1147-09-XXXXX0XX-A		

PROJECTION		TITLE	1.50mm ZH Wafer V/T SMT Type
UNITS	mm	SERIES	DS1147-09 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

