






REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/22/18'		

NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 150V AC.
 - INSULATION RESISTANCE:500M Ω min.
 - CONTACT RESISTANCE:70m Ω max.
 - CURRENT RATING:0.3A.
- PRODUCT NUMBER CODE:

DS1151-01 - X X X X X 0 X 0

- Packing Type
R:Tape On Reel
T:Tray
- Housing Color
B:Black
- Contact Plating
C:3u" Gold Flash
- Mounting Type
S:SMT Type
- Connector Type
S:Socket
- No.of Contacts
16 20 24 26 30
34 40 50 60 70

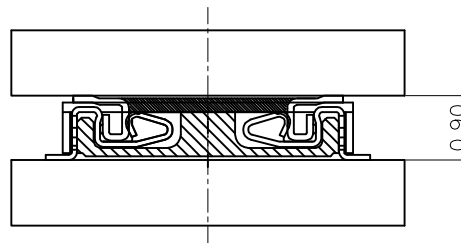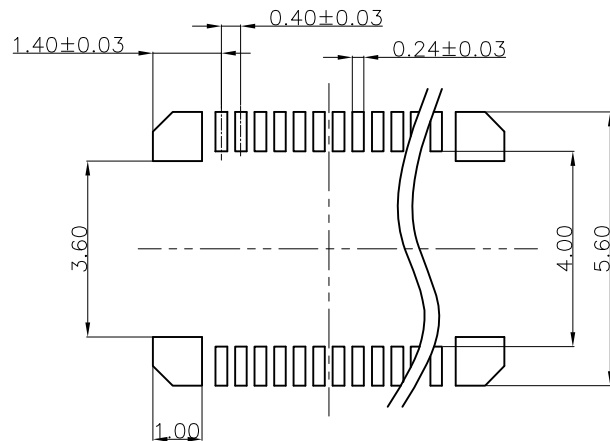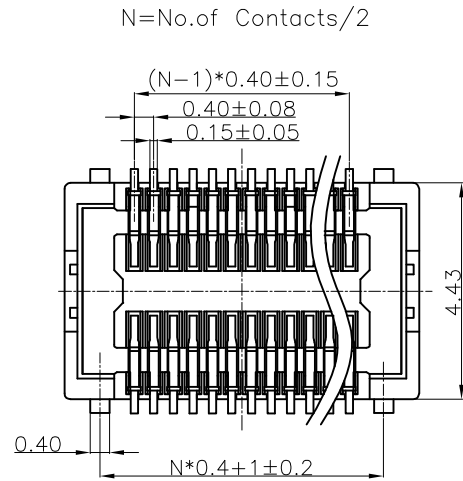

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	0.4mm Board to Board SMT H=0.9mm Series Female Type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1151-01 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONFLY CONFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1151-01-XXXXX0X0-A					