

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 25/06/05		LJC 25/06/05
B	DRAWING UPDATE	JLZ 07/25/17'		

NOTES:

1. SPECIFICATIONS

- . Current Rating: 0.5A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS





- . Contact Material: Copper alloy
- . Insulator: Thermoplastic(UL94 V-0)

3. PART NUMBER: DS1065-02

4. PRODUCT NUMBER CODE:

DS1065-02 - X X X X X X X X

- PACKING TYPE
R:TAPE ON REEL
N/A CODE:TUBE
- PICK UP SUPPORT
S:W/ PICK UP
N/A CODE:W/O PICK UP
- CONTACT BEND TYPE
1: B1 TYPE
2: B2 TYPE
- MOUNTING TYPE
S:SMT TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
No.OF CONTACTS
1*2-1*40

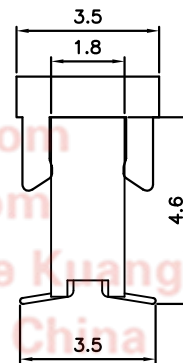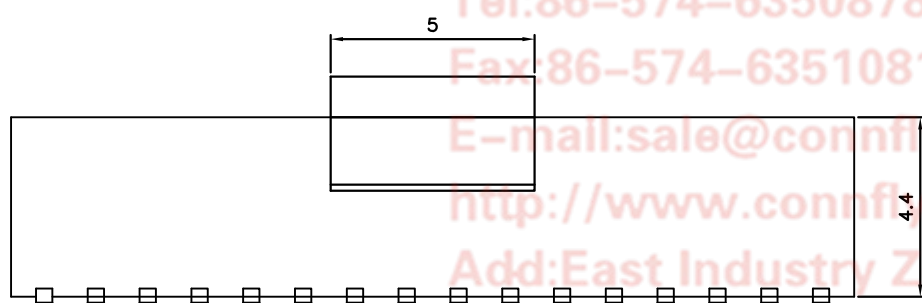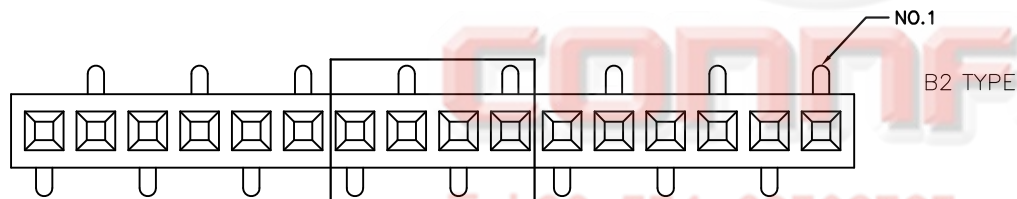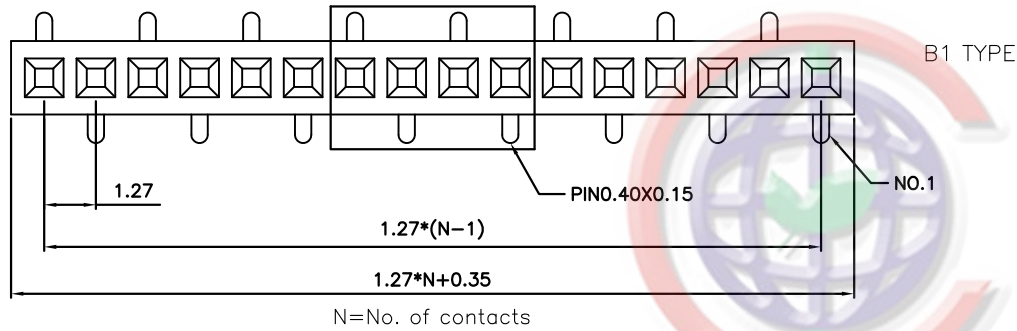

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE
X.	±0.60	X.	±5°	UNITS	mm		SINGLE ROW S.M.T
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-02
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1065-02-XXXXXXXXX-B					