

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/12/15'		

NOTES:

- Materials:
 - Housing material: NYLON 66
 - Contact: Copper Alloy
 - Wire Insulator: PVC
 - Wire: Tin Plated Copper
- Specifications:
 - Current Rating:1.5A
 - Voltage Rating:250V AC/DC
 - Contact Resistance: 20mΩ Max.(Connector Only)
 - Insulation resistance: 1000MΩ Min.(Connector Only)
 - Wire Range:AWG#22~26
- Packing Type:PE Bag+Inner Box+Ouler Box
- Product Number Code:
DS1070-05 - X X X X X X X

WIRE LENGTH(DIM L)
080: 80mm
180: 180mm

HOUSING COLOR
W: White


CONTACT PLATING
6: Full Tin
8: Full Gold

MOUNTING TYPE
C: Crimp

WIRE GAUGE
26: AWG #26 24: AWG #24
22: AWG #22

CONNECTOR TYPE
F: Female

No.OF CONTACTS
2~20

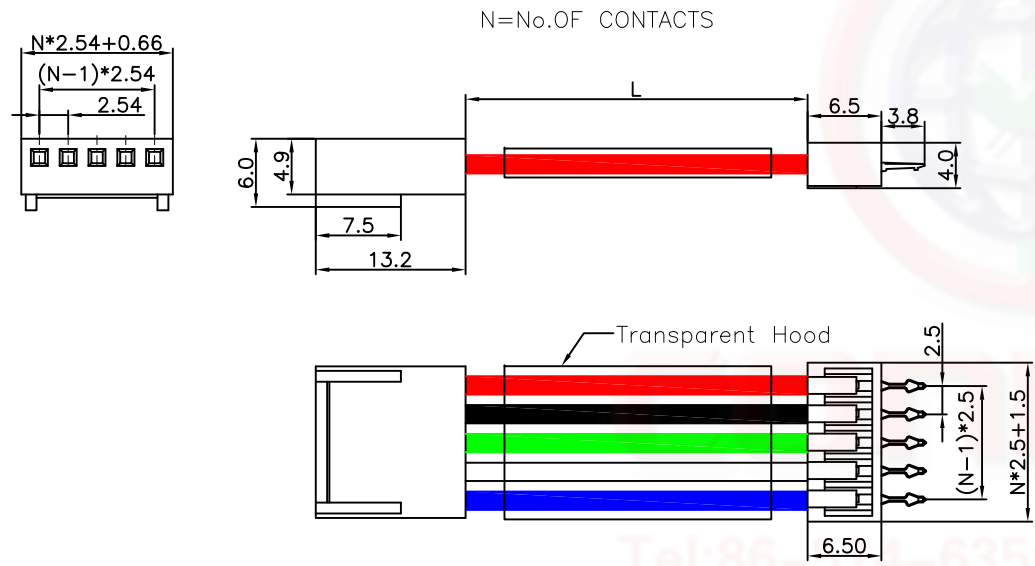

	PIN 1	Red
	PIN 2	Black
	PIN 3	Green
	PIN 4	White
	PIN 5	Blue
	PIN 6	Yellow
	PIN 7	Red
	PIN 8	Black
	PIN 9	Green
	PIN 10	White
	PIN 11	Blue

Tel:86-574-63508787
Fax:86-574-63510817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm 2510+SCN TYPE
X.	±0.60	X.	±5°	UNITS	mm	WITH CRIMP WIRE & TRANSPARENT HOOD	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1070-05 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1070-05-XXXXXXX-A					