


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/26/06'		

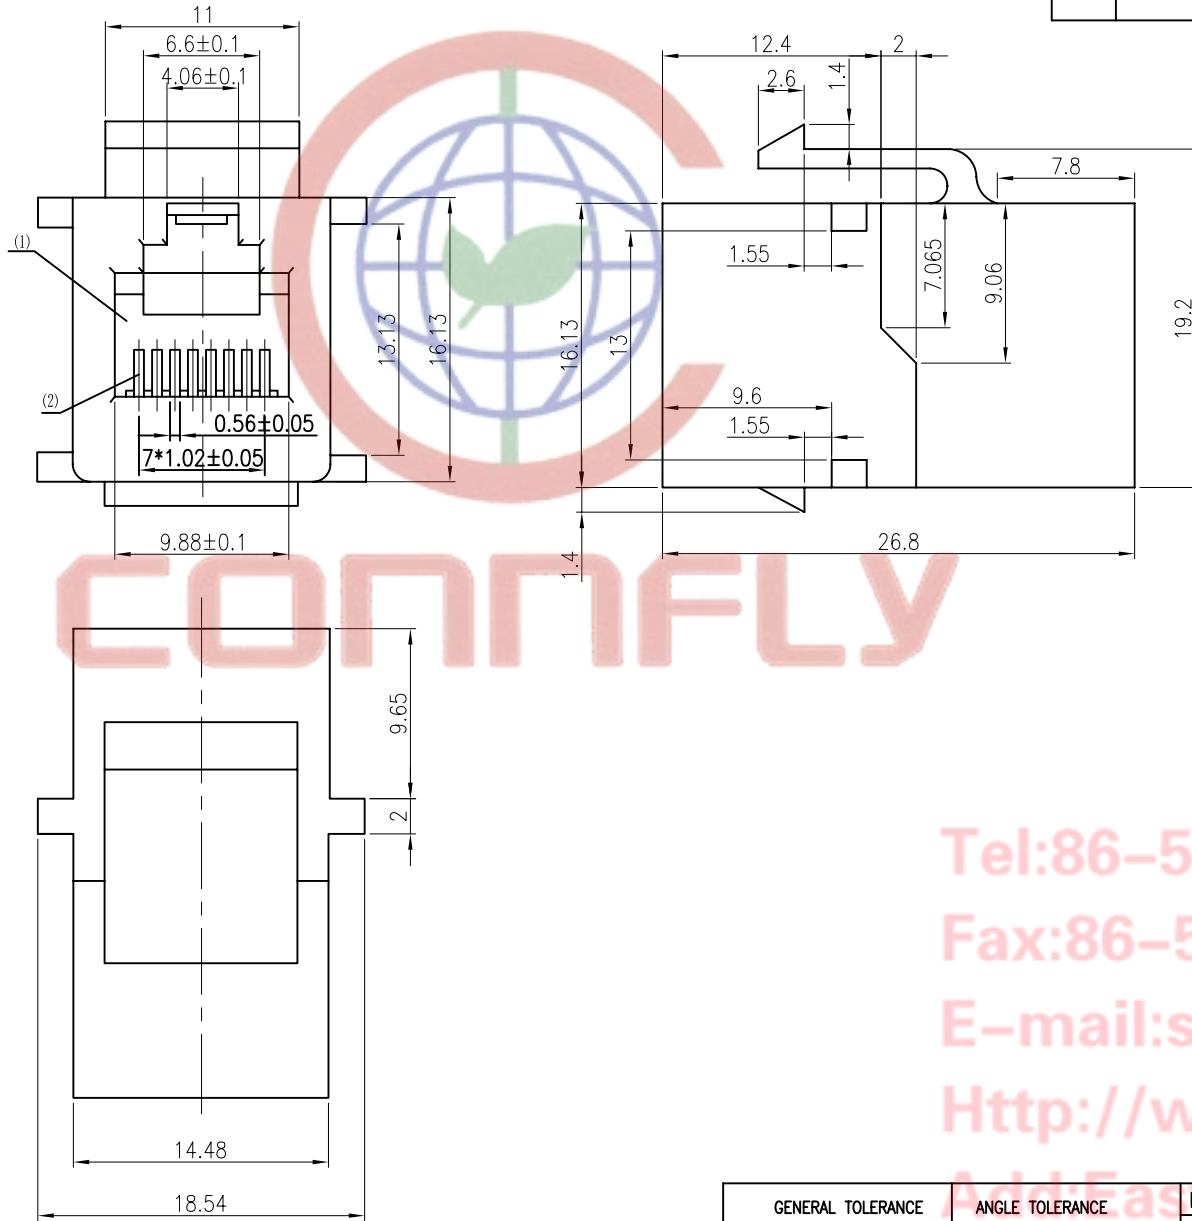

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1134-01-X X X X X

- Housing Materials  
P:PBT  
N:NYLON
- Housing Color  
B:Black
- Contact Plating  
0:Gold Flash  
3:3u" Gold  
6:6u" Gold  
15:15u" Gold  
X:W/O Plating
- No.Of Contacts  
0:W/O Contacts  
8: 8pin  
6: 6pin
- Connector Type  
S:Socket
- Series No.  
DS1134-01

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5' .X ±3' .XX ±2'	mm	PCB JACK 8P WITH LOCK TYPE
		SHEET SIZE	SERIES
		A4	DS1134-01 SERIES

(2) PIN	PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL	DRAWING TYPE	CUSTOMER
(1) HOUSING	1 ABS	UL94 V-0 OR 94 V-2	SCALE	1:1 SHEET 1 OF 1
No. PART NAME Q'TY	MATERAIL	REMARK	DRAWING NO.	C-DS1134-01-XXXXX


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**